



阳江市星阳工贸有限公司

地址：阳江市江城区中集国际城1期9栋101A别墅
电话：0662-221 2886
传真：0662-220 8887
邮箱：vivi@xycaster.com

阳江市奥得宝工贸有限公司

地址：阳江市江城区银岭科技产业园B10-9
电话：0662-220 6662/220 8886/220 3128
传真：0662-220 6662
邮箱：jacky@mwcaster.com

阳江市明威脚轮厂

地址：阳江市江城区银岭科技产业园
电话：220 9992/220 9993/220 3797
传真：0662-220 3977
邮箱：fengsongming@126.com

Yangjiang XingYang Industry & Trade Co.,LTD.

Add:Room 101A, building 9, shangdongxincheng, xiping north road, jiangcheng district, Yangjiang city, Guangdong province
Tel:0662-221 2886
Fax:0662-221 8887
E-mail:vivi@xycaster

Yangjiang AoDeBao Industry & Trade Co.,LTD.

Add:Yin Ling industrial park B10-9, Jiang Cheng district Yangjiang, Guangdong Province
Tel:0662-220 6662/220 8886/220 3128
Fax:0662-2206662
E-mail: Jacky@mwcaster.com

Yangjiang Mingwei caster plant

Add:Yin Ling industrial park, Jiang Cheng district Yangjiang, Guangdong Province
Tel:220 9992/220 9993/220 3797
Fax:0662-2203977
E-mail:fengsongming@126.com



MS
design
life






Mingwei Caster Plant(AoDeBao industry &trade co.,LTD.) is located in Yangjiang, a city famous for its international hardware products knives & scissors. It is a manufacturing enterprise that specializes in the production of caster, plastic hand cart, and manual hydraulic forklift. The company has the department of product research and it can manufacture its own products. The research team is young but it is efficiently managed. And it constantly introduces advanced production technology. The company has advanced and complete production equipment,(including many large-scale injection molding machines, with the model of 1400 tons or 600 tons, the hydraulic machines with 500 tons, advanced automatic automatic stamping production line and quality testing equipment). The plant which covers an area of 35000 square meters has neat and bright modern workshops.

The company found in 2005 now has four subsidiaries (Xingyang Industry&Trade Co.,LTD., Double Surplus Caster Plant, Mingwei Injection Plant, Xingyang Industry and Trade Co., L), Ming Wei has specialized in casterindustry more than 10 years with the purpose of establishing its own brands, and it adheres to the tenet of “quality first, customer satisfaction” . Because of the constant efforts of the team, now the company has two self-owned brands “Mingwei” and “Mingshang” . The main products cover more than 10 series casters,includinglight duty caters, medium duty casters, heavy duty casters, extra heavy duty casters, pneumatic casters, shock absorption casters, stainless steel casters, scaffolding casters and medical casters...Besides, the company also manufacture plastics trolleys, stainless steel trolleys,square tube trolleys, hydraulic forklift, luggage trolley and other products. The products with multiple sizes of Mingwei are widely used in industry, commerce, household appliances, furniture, packaging, transport, port, warehouse, medical facility and other fields. The products of Mingwei have won the approval and support of a number of customers because of their durability, the beautiful appearances, the wide range of uses, the favorable price, and the considerate services. And the products of Mingwei are sold to more than 30 provinces or cities and autonomous regions in our country and they are exported to Southeast Asia and other places oversea.

We firmly believe that as long as we insist in the policy oriented by market demand and powered by innovation, to develop and improve by the good quality we will be better in the future!



XINGYANG. Castor definition

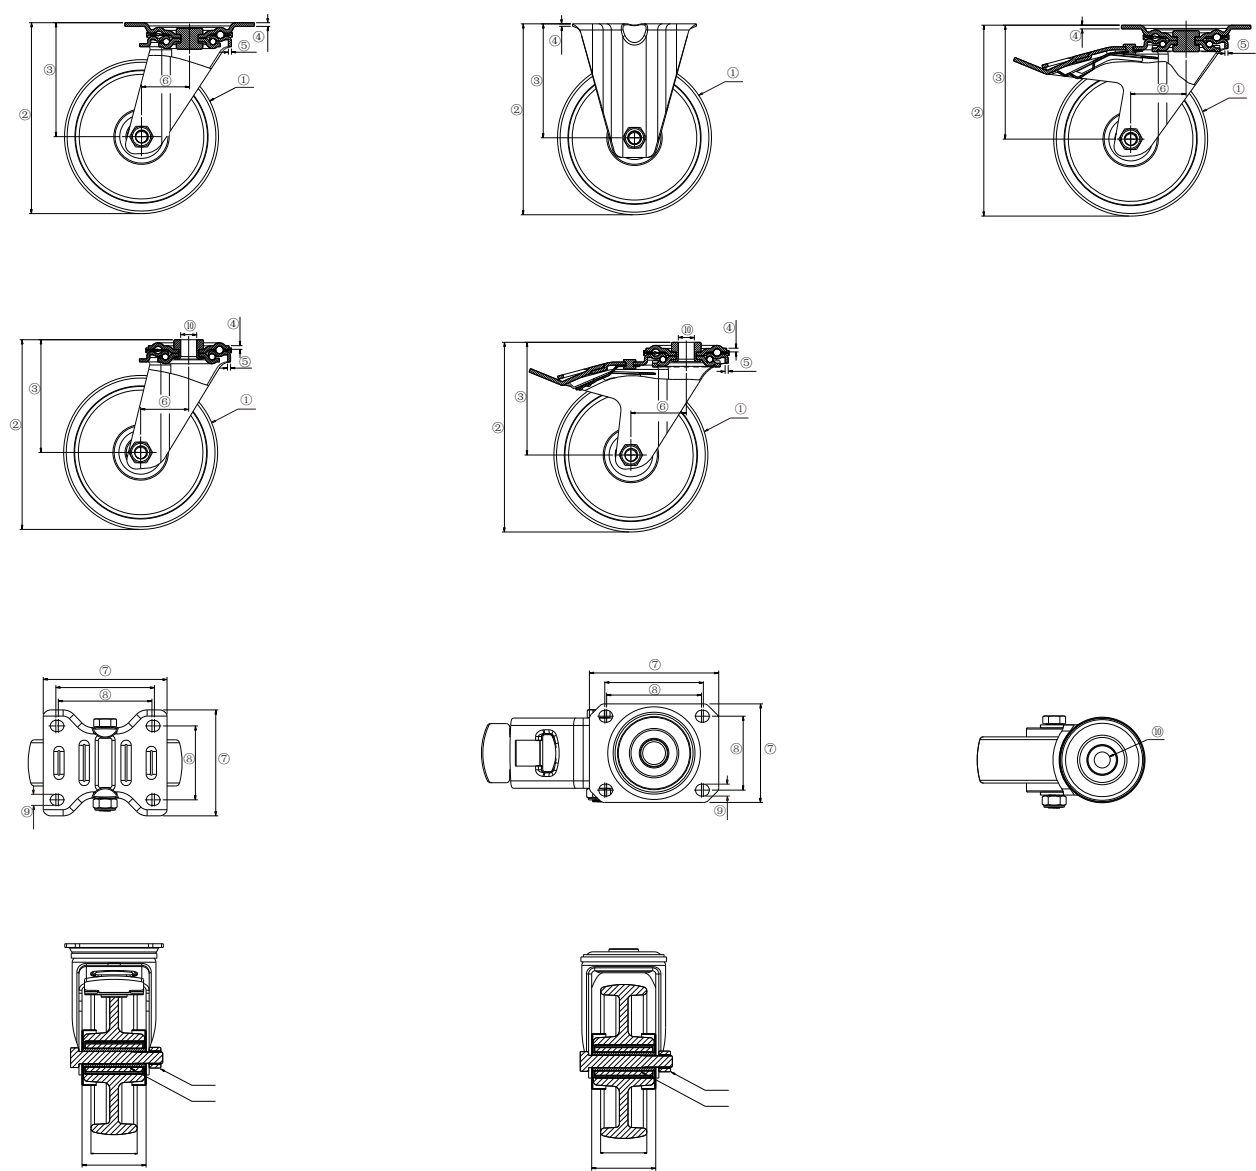

- ①

Wheel diameter
- ②

Total height
- ③

Mounting height
- ④

Material thickness plate
- ⑤

Material thickness fork
- ⑥

Offset
- ⑦


Dimension of plate
- ⑧

Dimension of plate holes
- ⑨

Diameter of plate holes
- ⑩

Diameter of bolt hole
- Width of tread
- Width of hub
- Wheel bearing
- Screw size

XINGYANG. Symbols. Housing.

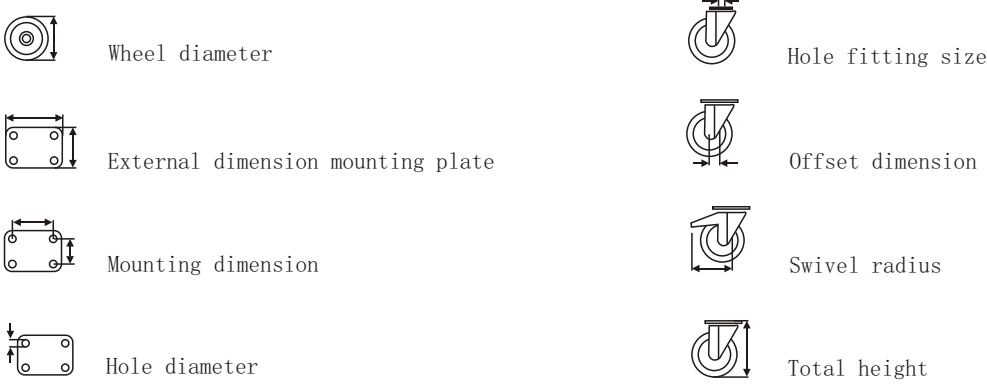

XINGYANG. Symbols. Wheel.



XINGYANG. Symbols. Wheel bearings.





Solemn

commitment 信心保证

Light Duty Series 轻型系列	01-10
Adjustable series 水平调节系列	11-12
Double series 双轮系列	13-14
Medical wheel series 医疗轮系列	15-26
Medium Duty series 中型系列	27-46
Stainless steel series 不锈钢系列	47-50
Medium and heavy duty series 中重型系列	51-54
Heavy duty series 重型系列	55-74
Heavy duty caster wheelB series can be used for trolley 可用于配套推车轮	75-82
Extra-heavy series 超重型系列	83-86
Low core series 低重芯系列	87-92
Inflatable wheel series 充气轮系列	93-94
Scaffolding series 鹰架系列	95-96
Shock absorbing wheel series 减震轮系列	97-100
Forklift wheel series 叉车轮系列	101-104
Plastic panel car series 胶板车系列	105-112



工欲善其事必先利其器。先进生产设备高速运转能保质，保量，保期地完成订单。

对产品细致要求，每个产品都要精密细造，力求每个客户用得放心。

Advanced production equipment can high-speed operation with good quality, products, in time to complete the order.

The detailed requirements for products, each product we made with care, to make all of our customer rest assured and content



200 tons punching machine



1500 tons Large injection molding machine



Warehouse



Mould independent research and development



Product Assembling



315 tons punching machine



600tons hydraulic machine



Finished Goods Warehouse



Precision measurement

Caster Test Machine



01

Light Duty Series 轻型系列



Light Duty PU/PVC Caster

小金钻 <<<

- Electrophoretic process
- Single wheel PU material
- Double ball bearing
- 电泳工艺
- 单轮PU/PVC材质
- 双滚珠轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
40	20	40	60	6	60X43	45X30	2	XJZ001XY-B1.5
50	24	60	73	8	70X51	53X35	2	XJZ001XY-B2
63	32	80	93	8.3	96X67	73X45	2.4	XJZ001XY-B2.5
75	32	100	93	8.3	96X67	73X45	2.4	XJZ001XY-B3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
40	20	40	60	6	60X43	45X30	2	XJZ001XY-S1.5
50	24	60	73	8	70X51	53X35	2	XJZ001XY-S2
63	32	80	93	8.3	96X67	73X45	2.4	XJZ030XY-S2.5
75	32	100	93	8.3	96X67	73X45	2.4	XJZ001XY-S3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
40	20	40	60	6	60X43	45X30	2	XJZ001XY-F1.5
50	24	60	73	8	70X51	53X35	2	XJZ001XY-F2
63	32	80	93	8.3	96X67	73X45	2.4	XJZ030XY-F2.5
75	32	100	93	8.3	96X67	73X45	2.4	XJZ001XY-F3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Thickness 支架厚度 (mm)	COOE
40	20	40	60	2	XJ '001XY-SB1.5
50	24	60	73	2	XJ '001XY-SB2
63	32	80	93	2.4	XJ '001XY-SB2.5
75	32	100	93	2.4	X. Z001XY-SB3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Thickness 支架厚度 (mm)	COOE
40	20	40	60	2	XJ '001XY-SS1.5
50	24	60	73	2	XJ '001XY-SS2
63	32	80	93	2.4	XJ '001XY-SS2.5
75	32	100	93	2.4	XJZ001XY-SS3



Light Duty PU Caster

小金刚 <<<

- High quality chrome plated bracket

■ Single wheel PU material

■ Double ball bearing
- 优质镀铬支 架

■ 单轮PU材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
40	20	40	60	6	60X43	45X30	2	XJG003XY-B1.5
50	24	60	73	8	70X51	53X35	2	XJG003XY-B2



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
40	20	40	60	6	60X43	45X30	2	XJG003XY-S1.5
50	24	60	73	8	70X51	53X35	2	XJG003XY-S2



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
40	20	40	60	6	60X43	45X30	2	XJG003XY-F1.5
50	24	60	73	8	70X51	53X35	2	XJG003XY-F2

Light Duty PU Caster

小金刚 <<<

- High quality chrome plated bracket

■ Single wheel rubber material

■ Double ball bearing
- 优质镀铬支 架

■ 单轮橡胶材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
40	20	40	60	6	60X43	45X30	2	XJG002XY-B1.5
50	24	60	73	8	70X51	53X35	2	XJG002XY-B2



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
40	20	40	60	6	60X43	45X30	2	XJG002XY-S1.5
50	24	60	73	8	70X51	53X35	2	XJG002XY-S2



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
40	20	40	60	6	60X43	45X30	2	XJG002XY-F1.5
50	24	60	73	8	70X51	53X35	2	XJG002XY-F2

The furniture caster wheel

家具轮 <<<

- Electrophoretic black surface treatment

■ Single wheel PU material

■ Ball bearing
- 电泳黑 表面处理

■ 单轮PU材质

■ 滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	 Thickness 支架厚度 (mm)	COOE
50	24	25	70	M11X22 M10X22	2	JB 011XY-S2
63	24	40	83	M11X22 M10X22	2	JW 012XY-S2.5
76	24	50	95	M11X22 M10X22	2	JW 012XY-S3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	 Thickness 支架厚度 (mm)	COOE
50	24	25	70	M11X22 M10X22	2	JB 011XY-B2
63	24	40	83	M11X22 M10X22	2	JW 012XY-B2.5
76	24	50	95	M11X22 M10X22	2	JW 012XY-B3

Fat caster wheel

肥仔轮系列 <<<

- High quality galvanized support

■ Single wheel PP material

■ Ball bearing
- 优质镀锌支 架

■ 单轮PP材质

■ 滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
38	23	40	50	6	61X44	48X23	2	MW04102-S1.5
50	24	60	65	6	65X50	52X23	2	MW04102-S2
60	29	80	80	6	98X70	75X40	2	Mw04102-S2.5
75	29	85	94	6	102X78	83X60	2	MW04102-S3
100	31	100	125	6	123X97	100X75	2	MW04102-S4



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
38	23	40	50	6	61X40	48X23	2	MW04101-F1.5
50	24	60	65	6	65X42	52X23	2	MW04101-F2
60	29	80	80	6	98X47	75X40	2	MW04101-F2.5
75	29	85	94	6	102X60	83X60	2	MW04101-F3
100	31	100	125	6	129X67	100X75	2	MW04101-F4



Mw04202



Mw04201

Red PVC caster wheel

红色 轻型轮 <<<

- High quality galvanized support

■ Single wheel PVC material

■ Ball bearing
- 优质镀锌支 架

■ 单轮PVC材质

■ 滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
38	17	20	50	5.2	46X25	36X15	2	RD 011XY-S1.5
50	17	35	65.5	6.4	58X40	45X25	2	RD 011XY-S2
63	25	40	80	8.4	70X58	55X42	2	RD 011XY-S2.5
75	30	50	99	8.4	70X58	55X42	2	RD 011XY-S3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
38	17	20	50	5.2	46X25	36X15	2	RD 012XY-B1.5
50	17	35	65.5	6.4	58X40	45X25	2	RD 012XY-B2
63	25	40	80	8.4	70X58	55X42	2	RD 012XY-B2.5
75	30	50	99	8.4	70X58	55X42	2	RD 012XY-B3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
38	17	20	50	5.2	46X25	36X15	2	RD 013XY-F1.5
50	22	35	65.5	6.4	58X40	45X25	2	RD 013XY-F2
63	25	40	80	8.4	70X47	55X28	2	RD 013XY-F2.5
75	25	50	99	8.4	70X47	55X28	2	RD 013XY-F3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	 Thickness 支架厚度 (mm)	COOE
38	17	20	50	15X25	2	RD 013XY-SB1.5
50	22	35	65.5	15X25	2	RD 013XY-SBF2
63	25	40	80	15X25	2	RD 013XY-SBF2.5
75	25	50	99	15X25	2	RD 013XY-SBF3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	 Thickness 支架厚度 (mm)	COOE
38	17	20	50	15X25	2	RD 013XY-SS1.5
50	22	35	65.5	15X25	2	RD 013XY-SSF2
63	25	40	80	15X25	2	RD 013XY-SSF2.5
75	25	50	99	15X25	2	RD 013XY-SSF3

Light duty PP wheel

轻型PP轮 <<<

- High quality galvanized support

■ Single wheel PP material

■ Ball bearing
- 优质镀锌支 架

■ 单轮PP材质

■ 滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
38	17	20	50	5.2	46X25	36X15	2	LP 011XY-S1.5
50	17	35	65.5	6.4	58X40	45X25	2	LP 011XY-S2
63	25	40	80	8.4	70X58	55X42	2	LP 011XY-S2.5
75	30	50	99	8.4	70X58	55X42	2	LP 011XY-S3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
38	17	20	50	5.2	46X25	36X15	2	LP 011XY-B1.5
50	17	35	65.5	6.4	58X40	45X25	2	LP 011XY-B2
63	25	40	80	8.4	70X58	55X42	2	LP 011XY-B2.5
75	30	50	99	8.4	70X58	55X42	2	LP 011XY-B3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
38	17	20	50	5.2	46X25	36X15	2	LP 011XY-F1.5
50	22	35	65.5	6.4	58X40	45X25	2	LP 011XY-F2
63	25	40	80	8.4	70X47	55X28	2	LP 011XY-F2.5
75	25	50	99	8.4	70X47	55X28	2	LP 011XY-F3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	 Thickness 支架厚度 (mm)	COOE
38	17	20	50	15X25	2	LP 011XY-SB1.5
50	22	35	65.5	15X25	2	LP 011XY-SB2
63	25	40	80	15X25	2	LP 011XY-SB2.5
75	25	50	99	15X25	2	LP 011XY-SB3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	 Thickness 支架厚度 (mm)	COOE
38	17	20	50	15X25	2	LP 011XY-SS1.5
50	22	35	65.5	15X25	2	LP 011XY-SS2
63	25	40	80	15X25	2	LP 011XY-SS2.5
75	25	50	99	15X25	2	LP 011XY-SS3

Light duty Rubber Caster Wheel

- High quality galvanized support

■ Single wheel rubber material

■ Ball bearing
- 优质镀锌支 架

■ 单轮橡胶材质

■ 滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
40	16	20	50	5.5	41X25	36X15	1.5	LR 011XY-S1.5
50	20	25	65	6.5	60X40	45X25	1.5	LR 011XY-S2
63	25	30	82	8.5	70X47	55X27	1.5	LR 011XY-S2.5
75	25	35	92	8.5	70X47	55X27	1.5	LR 011XY-S3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
40	16	20	50	5.5	46X38	36X28	1.5	LR 012XY-B1.5
50	20	25	65	6.5	58X46	46X35	1.5	LR 012XY-B2
63	25	30	82	8.5	70X58	55X43	1.5	LR 012XY-B2.5
75	25	35	92	8.5	70X58	55X43	1.5	LR 012XY-B3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
38	22	25	50	5.2	46X38		1.5	LR 013XY-F1.5
50	22	35	62	6.2	58X46		1.5	LR 013XY-F2
65	25	50	82	8.3	70X58		1.5	LR 013XY-F2.5
73	30	60	92	8.3	70X58		1.5	LR 013XY-F3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	 Thickness 支架厚度 (mm)	COOE
40	16	20	50	8X15	1.5	LR014XY-SB1.5
50	20	25	65	8X15	1.5	LR 014XY-SB2
63	25	30	82	10X15	1.5	LR 014XY-SB2.5
75	25	35	92	10X15	1.5	LR 014XY-SB3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	 Thickness 支架厚度 (mm)	COOE
40	16	20	50	8X15	1.5	LR 015XY-SS1.5
50	20	25	65	8X15	1.5	LR 015XY-SS2
63	25	30	82	10X15	1.5	LR 015XY-SS2.5
75	25	35	92	10X15	1.5	LR 015XY-SS3

轻型橡胶轮 <<<

Light dutyTPR caster wheel

轻型TPR轮 <<<

- High quality galvanized support

■ Single wheel rubber material

■ Ball bearing
- 优质镀锌支 架

■ 单轮橡胶材质

■ 滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
25	12	10	35	4	38X30	29X21	1.2	CJ014XY-F1
32	12	15	44	4	39X33	30X24	1.2	CJ014XY-F1.25
38	16	20	52	5	49X39	36X28	1.5	CJ014XY-F1.5
50	20	30	75	6.5	60X49	45X32	1.8	CJ014XY-F2
63	22	40	92	7	60X49	45X32	1.8	CJ014XY-F2.5
75	25	50	104	8.3	73X60	54X39	2	CJ014XY-F3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
25	12	10	35	4	38X30	29X21	1.2	CJ014XY-S1
32	12	15	44	4	39X33	30X24	1.2	CJ014XY-S1.25
38	16	20	52	5	49X39	36X28	1.5	CJ014XY-S1.5
50	20	30	75	6.5	60X49	45X32	1.8	CJ014XY-S2
63	22	40	92	7	60X49	45X32	1.8	CJ014XY-S2.5
75	25	50	104	8.3	73X60	54X39	2	CJ014XY-S3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
25	12	10	35	4	38X30	29X21	1.2	CJ014XY-B1
32	12	15	44	4	39X33	30X24	1.2	CJ014XY-B1.25
38	16	20	52	5	49X39	36X28	1.5	CJ014XY-B1.5
50	20	30	75	6.5	60X49	45X32	1.8	CJ014XY-B2
63	22	40	92	7	60X49	45X32	1.8	CJ014XY-B2.5
75	25	50	104	8.3	73X60	54X39	2	CJ014XY-B3



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	 Thickness 支架厚度 (mm)	COOE
25	12	10	35	M8X21	1.2	JY015XY-SS1
32	12	15	44	M8X21	1.2	JY015XY-SS1.25
38	16	20	52	M8X21	1.5	JY015XY-SS1.5
50	20	30	75	M8X21	1.8	JY015XY-SS2
63	22	40	92	M8X21	1.8	JY015XY-SS2.5
75	25	50	104	M8X21	2	JY015XY-SS3

02

Adjustable series 水平调节系列

Adjustable series

水平调节系列 <<<

- High quality chrome plated bracket
- Single wheel nylon material
- 优质镀铬支架
- 单轮尼龙材质



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
40	19.2	50	72	75+8	7.2	55X55	42X42	2	XJG003XY-40A
50	24	250	85.7	85+10	7.5	73X73	58X58	2	XJG003XY-60A
62	30.7	500	106.5	110+12	8.8	90X90	70X70	2	XJG003XY-80A
75	32	750	119	120+12	11	95X95	70X70	2	XJG003XY-100A
75	32	1000	120	120+12	11	95X95	70X70	2	XJG003XY-120A

Adjustable series

水平调节系列 <<<

- High quality chrome plated bracket
- Single wheel PP material
- 优质镀铬支架
- 单轮PP材质



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
50	25	35	75	8.5	65X65	45X45	2.5	JN 026XY-A2
100	40	500	135	11.5	113X100	84.5X71	3	JN 025XY-A4
125	40	600	158	11.5	113X100	84.5X71	3	JN 025XY-A5



JN 025XY-A4



JN 025XY-A5

Easy moving,fixing,adjustable
height,anti-vibration and 360 rotation all-in-one

03

Double series
双轮系列



Double wheel caster wheel

双轮系列<<<

- High quality chrome plated bracket

■ Single wheel TPR material
- 优质镀锌支架

■ 单轮TPR材质



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	CODE
50	18X2	70	75	6	60X60	43X43	2	DW-017XY-B2



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	CODE
50	18X2	70	75	6	60X60	43X43	2	DW-017XY-S2



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	CODE
50	18X2	70	77	6	94X62	75X43	2	DW-018XY-S2



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	CODE
75	23X2	90	102	6	65X65	45X45	2	DW-019XY-B3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	CODE
75	23X2	90	102	6	65X65	45X45	2	DW-019XY-S3

04

Medical wheel series
医疗轮系列

Double PieceHig Grade Medical
Superimposed Brake Casters

高档医疗碟刹双片轮
(灰色) <<<

- Applicable to medical equipment and beds
 - Mute effect: Bearing Steel mute, high strength, low noise
 - Humanized design, stable braking performance
 - Easier to use
- 适用于医疗设备、病床
 - 静音效果：轴承钢静音、高强度、低噪音
 - 人性化设计，刹车性能稳定
 - 使用更便捷



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	COOE
75	58	60	103	8.5	70X58	50X40	YY 047XY-S3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 丝杆规格 (mm)	COOE
75	24	60	94	M12X25	YY 047XY-SB3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 丝杆规格 (mm)	COOE
120	85	125	146	M16X30	YY 048XY-SB5



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 丝杆规格 (mm)	COOE
120	85	125	146	M16X30	YY 048XY-SS5

- Applicable to medical equipment and beds
 - Mute effect: Bearing Steel mute, high strength, low noise
 - Humanized design, stable braking performance
 - Easier to use
- 适用于医疗设备、病床
 - 静音效果：轴承钢静音、高强度、低噪音
 - 人性化设计，刹车性能稳定
 - 使用更便捷

Double PieceHigh Grade
Medical Superimposed Brake Casters

高档医疗轮 <<<

- Suitable for medical equipment, beauty instruments, high-grade carts, beds

■ Appearance design: novel style, exquisite appearance and unique design

■ Mute effect: Bearing Steel mute, high strength, low noise

■ Brake effect: composite double stack brake, pedal structure

■ Humanized design, stable braking performance
- 适用于医疗设备、美容仪器、高档推车、病床

■ 外观设计：款式新颖、外观精巧、设计独特

■ 静音效果：轴承钢静音、高强度、低噪音

■ 刹车效果：复合式双叠刹、踩踏式结构

■ 人性化设计，刹车性能稳定

							COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	
75	56	60	98	8.5	70X58	50X40 60X45	01A-02-382G-075
100	56	80	125	8.5	90X75	60X50 70X55	01A-02-382G-100
125	56	125	155	8.5	90X75	60X50 70X55	01A-02-382G-125

							COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	
75	56	60	98	8.5	70X58	50X40 60X45	01A-02-382G-075
100	56	80	125	8.5	90X75	60X50 70X55	01A-02-382G-100
125	56	125	155	8.5	90X75	60X50 70X55	01A-02-382G-125

					COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	
75	56	60	56	M12X25	01A-03-382G-075
100	56	80	80	M12X25	01A-03-382G-100
125	56	125	80	M16X25	01A-03-382G-125

					COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	
75	56	60	56	M12X25	01A-03D-382G-075
100	56	80	80	M12X25	01A-03D-382G-100
125	56	125	80	M16X25	01A-03D-382G-125

Double Piece Instrument
Casters

双片仪器脚轮<<<

- PU+PA+ABS

■ Deling
- 高科技聚氨酯包尼龙+强度ABS环保工程塑料

■ 特尔灵

					COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	
75	47.5	60	102	M12X25	01A-03D-384G-075

					COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	
75	47.5	60	102	Φ 22X40	01A-04-384G-075

					COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	
75	47.5	60	102	Φ 22X40	01A-04D-384G-075

Double Piece medical Casters

双轮医疗脚轮 <<<

- PU+PA+ABS

■ Double Bell Bearing
- 高科技聚氨酯包尼龙+强度ABS环保工程塑料

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	COOE
75	56	60	102	8.5	76X61	50X40 60X45	01A-02-382G-075
100	56	80	125	8.5	90X75	60X50 70X55	01A-02-382G-100
125	56	125	155	8.5	90X75	60X50 70X55	01A-02-382G-125



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	COOE
75	56	60	102	8.5	76X61	50X40 60X45	01A-02D-382G-075
100	56	80	125	8.5	90X75	60X50 70X55	01A-02D-382G-100
125	56	125	155	8.5	90X75	60X50 70X55	01A-02D-382G-125



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	COOE
75	56	60	102	M12X25	01A-03-382G-075
100	56	80	125	M12X25	01A-03-382G-100
125	56	125	155	M16X25	01A-03-382G-125



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	COOE
75	56	60	102	M12X25	01A-03D-382G-075
100	56	80	125	M12X25	01A-03D-382G-100
125	56	125	155	M16X25	01A-04D-382G-125



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	COOE
75	56	60	102	Φ 28X40	01A-04-382G-075
100	56	80	125	Φ 28X40	01A-04-382G-100
125	56	125	155	Φ 28X40	01A-04-382G-125



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	COOE
75	56	60	102	Φ 28X40	01A-04D-382G-075
100	56	80	125	Φ 28X40	01A-04D-382G-100
125	56	125	155	Φ 28X40	01A-04D-382G-125

American Full Plastic Medical Casters

美式全塑医疗脚轮<<<

- TPR+PA

■ Single Ball Bearing
- 超级人造胶包尼龙

■ 单滚珠轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	COOE
75	32	70	123	8.5	93X64	74.5X45	01P-02-401G-075
100	32	85	138	8.5	93X64	74.5X45	01P-02-401G-100
125	32	105	165	8.5	93X64	74.5X45	01P-02-401G-125



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	COOE
75	32	70	123	8.5	93X64	74.5X45	01P-02D-401G-075
100	32	85	138	8.5	93X64	74.5X45	01P-02D-401G-100
125	32	105	165	8.5	93X64	74.5X45	01P-02D-401G-125



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	COOE
75	32	70	98	M12X25	01P-03-401G-075
100	32	85	125	M12X25	01P-03-401G-100
125	32	105	155	M16X25	01P-03-401G-125



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	COOE
75	32	70	98	M12X25	01P-03D-401G-075
100	32	85	125	M12X25	01P-03D-401G-100
125	32	105	155	M16X25	01P-03D-401G-125



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	COOE
75	32	70	123	28X40	01P-04-401G-075
100	32	85	138	28X40	01P-04-401G-100
125	32	105	165	28X40	01P-04-401G-125



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	COOE
75	32	70	123	28X40	01P-04D-401G-075
100	32	85	138	28X40	01P-04D-401G-100
125	32	105	165	28X40	01P-04D-401G-125

- Applicable to medical equipment and beds

■ Mute effect: Bearing Steel mute, high strength, low noise

■ Humanized design, stable braking performance

■ Easier to use
- 适用于医疗设备、病床

■ 静音效果：轴承钢静音、高强度、低噪音

■ 人性化设计，刹车性能稳定

■ 使用更便捷

Cladding Medical Treatment Casters

包壳医疗脚轮<<<

- PU+PA+ABS
- Double Bell Bearing

- 高科技聚氨酯包尼龙+强度ABS环保工程塑料
- 双滚珠轴承

							COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	
75	32	75	108	8.5	95X63	75X45	01ZA-02-401G-075
100	32	90	133	8.5	95X63	75X45	01ZA-02-401G-100
125	32	110	158	8.5	95X63	75X45	01ZA-02-401G-125

							COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	
75	32	75	108	8.5	95X63	75X45	01ZA-02-401G-075
100	32	90	133	8.5	95X63	75X45	01ZA-02-401G-100
125	32	110	158	8.5	95X63	75X45	01ZA-02-401G-125

					COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	
75	32	75	108	M12X25	01ZA-03-401G-075
100	32	90	133	M12X25	01ZA-03-401G-100
125	32	110	158	M12X25	01ZA-03-401G-125

					COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	
75	32	75	108	M12X25	01ZA-03D-401G-075
100	32	90	133	M12X25	01ZA-03D-401G-100
125	32	110	158	M12X25	01ZA-03D-401G-125

Cladding Medical Treatment Casters

包壳医疗脚轮<<<

- PU+PA+ABS
- Single Ball Bearing

- 高科技聚氨酯包尼龙+强度ABS环保工程塑料
- 单滚珠轴承

					COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	
75	32	75	108	Φ28X40	01ZA-04-401G-075
100	32	90	133	Φ28X40	01ZA-04-401G-100
125	32	110	158	Φ28X40	01ZA-04-401G-125

					COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	
75	32	75	108	Φ28X40	01ZA-04D-401G-075
100	32	90	133	Φ28X40	01ZA-04D-401G-100
125	32	110	158	Φ28X40	01ZA-04D-401G-125

						COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Plate Size 订座纵面尺寸 (mm)	Plate Size 订座切面尺寸 (mm)	Hole distance 孔距 (mm)	
75	32	75	22/47	47/55	8.5	01ZA-05-401G-075
100	32	90	22/47	47/55	8.5	01ZA-05-401G-100
125	32	110	22/47	47/55	8.5	01ZA-05-401G-125

						COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Plate Size 订座纵面尺寸 (mm)	Plate Size 订座切面尺寸 (mm)	Hole distance 孔距 (mm)	
75	32	75	22/47	47/55	8.5	01ZA-05D-401G-075
100	32	90	22/47	47/55	8.5	01ZA-05D-401G-100
125	32	110	22/47	47/55	8.5	01ZA-05D-401G-125

Cladding Medical Treatment Casters

包壳医疗脚轮<<<

- It is suitable for medical equipment, general sickbed and medical cart
 - Mute effect: Bearing Steel mute, high strength, low noise
 - Humanized design, stable braking performance
 - Easier to use
- 适用于医疗设备、普通病床、医疗推车
 - 静音效果：轴承钢静音、高强度、低噪音
 - 人性化设计，刹车性能稳定
 - 使用更便捷



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	COOE
75	32	70	110	8.5	95X63	75X45	01ZA-02-312T-075
100	32	90	135	8.5	95X63	75X45	01ZA-02-312T-100
125	32	110	160	8.5	95X63	75X45	01ZA-02-312T-125



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	COOE
75	32	70	110	8.5	95X63	75X45	01ZA-02D-312T-075
100	32	90	135	8.5	95X63	75X45	01ZA-02D-312T-100
125	32	110	160	8.5	95X63	75X45	01ZA-02D-312T-125



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	COOE
75	32	75	110	M12X25	01AZ-03-312T-075
100	32	90	135	M12X25	01AZ-03-312T-100
125	32	110	160	M12X25	01AZ-03-312T-125



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	COOE
75	32	75	110	M12X25	01ZA-03D-312T-075
100	32	90	135	M12X25	01ZA-03D-312T-100
125	32	110	160	M12X25	01ZA-03D-312T-125

Medium-sized Medical Casters

中型医疗脚轮<<<

- TPR+PP
 - Single Ball Bearing
- 人造胶包尼龙
 - 单滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	COOE
75	32	60	108	8.5	95X63	75X45	01Z-02-401G-075
100	32	80	133	8.5	95X63	75X45	01Z-02-401G-100
125	32	100	158	8.5	95X63	75X45	01Z-02-401G-125



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	COOE
75	32	60	108	8.5	95X63	75X45	01Z-02D-401G-075
100	32	80	133	8.5	95X63	75X45	01Z-02D-401G-100
125	32	100	158	8.5	95X63	75X45	01Z-02D-401G-125



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	COOE
75	32	60	108	M12X25	01Z-03-401G-075
100	32	80	133	M12X25	01Z-03-401G-100
125	32	100	158	M12X25	01Z-03-401G-125



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Pole Specs 线杆规格 (mm)	COOE
75	32	60	108	M12X25	01Z-03D-401G-075
100	32	80	133	M12X25	01Z-03D-401G-100
125	32	100	158	M12X25	01Z-03D-401G-125

05

Medium Duty series 中型系列

Medium duty PVC caster wheel A

中型双抽通花轮 <<<

- High quality galvanized support
- Single wheel PVC material
- Double ball bearing
- 优质镀锌支架
- 单轮PVC材质
- 双滚珠轴承



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	90	106	8.3	93X67	73X45	2.5	MW02303-B3
100	32	120	130	8.3	93X67	73X45	2.5	MW02303-B4
125	32	130	153	8.3	93X67	73X45	2.5	MW02303-B5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	90	106	8.3	93X67	73X45	2.5	MW0232-S3
100	32	120	130	8.3	93X67	73X45	2.5	MW0232-S4
125	32	130	153	8.3	93X67	73X45	2.5	MW0232-S5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	90	106	8.3	93X67	73X45	2.5	MW02301-F3
100	32	120	130	8.3	93X67	73X45	2.5	MW02301-F4
125	32	130	153	8.3	93X67	73X45	2.5	MW02301-F5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
75	32	90	106	12X30	2	MW02306-SB3
100	32	120	131	12X30	2	MW02306-SB4
125	32	130	156	12X30	2	MW02306-SB5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
75	32	90	106	12X30	2	MW02305-SS3
100	32	120	131	12X30	2	MW02305-SS4
125	32	130	156	12X30	2	MW02305-SS5

Medium duty PVC(PU)
caster wheel-Black

中型双轴PVC(PU) <<<

- High quality galvanized support

■ Single wheel PVC(PU) material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PVC(PU)材质

■ 双滚珠轴承

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	90	106	8.3	93X67	73X45	2.5	MWA02-303-B3
	100	32	120	130	8.3	93X67	73X45	2.5	MWA02-303-B4
	125	32	130	153	8.3	93X67	73X45	2.5	MWA02-303-B5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	90	106	8.3	93X67	73X45	2.5	MWA02-302-S3
	100	32	120	130	8.3	93X67	73X45	2.5	MWA02-302-S4
	125	32	130	153	8.3	93X67	73X45	2.5	MWA02-302-S5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	90	106	8.3	93X67	73X45	2.5	MWA02-301-F3
	100	32	120	130	8.3	93X67	73X45	2.5	MWA02-301-F4
	125	32	130	153	8.3	93X67	73X45	2.5	MWA02-301-F5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
	75	32	90	106	12X30	2	MWA02-306-SB3
	100	32	120	131	12X30	2	MWA02-306-SB4
	125	32	130	156	12X30	2	MWA02-306-SB5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
	75	32	90	106	12X30	2	MWA02-305-SS3
	100	32	120	131	12X30	2	MWA02-305-SS4
	125	32	130	156	12X30	2	MWA02-305-SS5

Medium duty PVC(PU)
caster wheel-Dark Red

中型双轴PVC(PU) <<<

- High quality galvanized support

■ Single wheel PVC (PU)material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PVC(PU)材质

■ 双滚珠轴承

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	90	106	8.3	93X67	73X45	2.5	MW02203-B3
	100	32	120	130	8.3	93X67	73X45	2.5	MW02203-B4
	125	32	130	153	8.3	93X67	73X45	2.5	MW02203-B5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	90	106	8.3	93X67	73X45	2.5	MW02202-S3
	100	32	120	130	8.3	93X67	73X45	2.5	MW02202-S4
	125	32	130	153	8.3	93X67	73X45	2.5	MW02202-S5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	90	106	8.3	93X67	73X45	2.5	MW02201-F3
	100	32	120	130	8.3	93X67	73X45	2.5	MW02201-F4
	125	32	130	153	8.3	93X67	73X45	2.5	MW02201-F5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
	75	32	90	106	12X30	2	MW02206-SB3
	100	32	120	131	12X30	2	MW02206-SB4
	125	32	130	156	12X30	2	MW02206-SB5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
	75	32	90	106	12X30	2	MW02205-SS3
	100	32	120	131	12X30	2	MW02205-SS4
	125	32	130	156	12X30	2	MW02205-SS5

Medium duty PVC(PU)
caster wheel-Black
single bearing

- High quality galvanized support
- Single wheel PVC(PU) material
- Single bearing
- 优质镀锌支架
- 单轮PVC材质
- 单滚珠轴承

								COOE
75	32	90	106	8.3	93X67	73X45	2.5	MW02703-B3
100	32	120	130	8.3	93X67	73X45	2.5	MW02703-B4
125	32	130	153	8.3	93X67	73X45	2.5	MW02703-B5

								COOE
75	32	90	106	8.3	93X67	73X45	2.5	MW02702-S3
100	32	120	130	8.3	93X67	73X45	2.5	MW02702-S4
125	32	130	153	8.3	93X67	73X45	2.5	MW02702-S5

								COOE
75	32	90	106	8.3	93X67	73X45	2.5	MW02701-F3
100	32	120	130	8.3	93X67	73X45	2.5	MW02701-F4
125	32	130	153	8.3	93X67	73X45	2.5	MW02701-F5

						COOE
75	32	90	106	12X30	2	MW02705-SB3
100	32	120	131	12X30	2	MW02705-SB4
125	32	130	156	12X30	2	MW02705-SB5

						COOE
75	32	90	106	12X30	2	MW02705-SS3
100	32	120	131	12X30	2	MW02705-SS4
125	32	130	156	12X30	2	MW02705-SS5

中型单轴PU轮(PVC) <<<

Medium duty PVC(PU)
caster wheel-Dark Red
single bearing

- High quality galvanized support
- Single wheel PVC(PU)material
- Single bearing
- 优质镀锌支架
- 单轮PVC材质
- 单滚珠轴承

								COOE
75	32	100	106	8.3	93X67	73X45	2.5	MW02603-B3
100	32	120	130	8.3	93X67	73X45	2.5	MW02603-B4
125	32	130	153	8.3	93X67	73X45	2.5	MW02603-B5

								COOE
75	32	100	106	8.3	93X67	73X45	2.5	MW02602-S3
100	32	120	130	8.3	93X67	73X45	2.5	MW02602-S4
125	32	130	153	8.3	93X67	73X45	2.5	MW02602-S5

								COOE
75	32	100	106	8.3	93X67	73X45	2.5	MW02601-F3
100	32	120	130	8.3	93X67	73X45	2.5	MW02601-F4
125	32	130	153	8.3	93X67	73X45	2.5	MW02601-F5

						COOE
75	32	100	106	12X30	2	MW02605-SB3
100	32	120	131	12X30	2	MW02605-SB4
125	32	130	156	12X30	2	MW02605-SB5

						COOE
75	32	100	106	12X30	2	MW02605-SS3
100	32	120	131	12X30	2	MW02605-SS4
125	32	130	156	12X30	2	MW02605-SS5

Medium duty TPR
caster wheel

中型天然弹力轮(静音轮) <<<

- High quality galvanized support

■ Single wheel TPR material

■ Double ball bearing
- 优质镀锌支架

■ 单轮TPR材质

■ 双滚珠轴承



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	100	106	8.3	93X67	73X45	2.5	MW02403-B3
100	32	120	130	8.3	93X67	73X45	2.5	MW02403-B4
125	32	130	153	8.3	93X67	73X45	2.5	MW02403-B5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	100	106	8.3	93X67	73X45	2.5	MW02402-S3
100	32	120	130	8.3	93X67	73X45	2.5	MW02402-S4
125	32	130	153	8.3	93X67	73X45	2.5	MW02402-S5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	100	106	8.3	93X67	73X45	2.5	MW02401-F3
100	32	120	130	8.3	93X67	73X45	2.5	MW02401-F4
125	32	130	153	8.3	93X67	73X45	2.5	MW02401-F5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
75	32	100	106	12X30	2	MW02406-SB3
100	32	120	130	12X30	2	MW02406-SB4
125	32	130	156	12X30	2	MW02406-SB5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
75	32	100	106	12X30	2	MW02405-SS3
100	32	120	130	12X30	2	MW02405-SS4
125	32	130	156	12X30	2	MW02405-SS5

Medium duty TPR
caster wheel

中型双轴超人胶轮(静音轮) <<<

- High quality galvanized support

■ Single wheel TPR material

■ Double ball bearing
- 优质镀锌支架

■ 单轮TPR材质

■ 双滚珠轴承



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	100	106	8.3	93X67	73X45	2.5	MW02403-B3
100	32	120	130	8.3	93X67	73X45	2.5	MW02403-B4
125	32	130	153	8.3	93X67	73X45	2.5	MW02403-B5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	100	106	8.3	93X67	73X45	2.5	MW02402-S3
100	32	120	130	8.3	93X67	73X45	2.5	MW02402-S4
125	32	130	153	8.3	93X67	73X45	2.5	MW02402-S4



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	100	106	8.3	93X67	73X45	2.5	MW02401-F3
100	32	120	130	8.3	93X67	73X45	2.5	MW02401-F4
125	32	130	153	8.3	93X67	73X45	2.5	MW02401-F5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
75	32	100	106	12X30	2	MW02406-SB3
100	32	120	130	12X30	2	MW02406-SB4
125	32	130	156	12X30	2	MW02406-SB5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
75	32	100	106	12X30	2	MW02405-SS3
100	32	120	130	12X30	2	MW02405-SS4
125	32	130	156	12X30	2	MW02405-SS5

Medium duty TPR
caster wheel

- High quality galvanized support

■ Single wheel TPR material

■ Double ball bearing
- 优质镀锌支架

■ 单轮TPR材质

■ 双滚珠轴承

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01303-B3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01303-B4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01303-B5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01302-S3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01302-S4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01302-S

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01501-F3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01501-F4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01501-F5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
	75	32	100	106	12X30	2	MS01305-SB3
	100	32	120	131	12X30	2	MS01305-SB4
	125	32	130	156	12X30	2	MS01305-SB5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
	75	32	100	106	12X30	2	MS01304-SS3
	100	32	120	131	12X30	2	MS01304-SS4
	125	32	130	156	12X30	2	MS01304-SS5

中型TPR <<<

Medium duty PU
caster wheel

- High quality galvanized support

■ Single wheel PU material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PU材质

■ 双滚珠轴承

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01403-B3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01403-B4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01403-B5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01402-S3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01402-S4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01402-S5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (mm)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01401-F3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01401-F4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01401-F5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
	75	32	100	106	12X30	2	MS01405-SB3
	100	32	120	131	12X30	2	MS01405-SB4
	125	32	130	156	12X30	2	MS01405-SB5

	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
	75	32	100	106	12X30	2	MS01404-SS3
	100	32	120	131	12X30	2	MS01404-SS4
	125	32	130	156	12X30	2	MS01404-SS5

中型PU <<<

Medium duty Nylon
caster wheel A

中型双轴白尼龙 <<<

- High quality galvanized support

■ Single wheel nylon material

■ Double ball bearing
- 优质镀锌支架

■ 单轮尼龙材质

■ 双滚珠轴承

	 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01303-B3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01303-B4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01303-B5

	 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01302-S3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01302-S4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01302-S5

	 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01501-F3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01501-F4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01501-F5

	 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Pole Specs mm)	 Thickness mm)	COOE
	75	32	100	106	12X30	2	MS01305-SB3
	100	32	120	131	12X30	2	MS01305-SB4
	125	32	130	156	12X30	2	MS01305-SB5

	 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Pole Specs mm)	 Thickness mm)	COOE
	75	32	100	106	12X30	2	MS01304-SS3
	100	32	120	131	12X30	2	MS01304-SS4
	125	32	130	156	12X30	2	MS01304-SS5

Medium duty Nylon
caster wheel B

中型双轴尼龙 <<<

- High quality galvanized support

■ Single wheel nylon material

■ Double ball bearing
- 优质镀锌支架

■ 单轮尼龙材质

■ 双滚珠轴承

	 Wheel Dia mm)	 Tread Width mm)	 Load Capacity mm)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01303-B3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01303-B4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01303-B5

	 Wheel Dia mm)	 Tread Width mm)	 Load Capacity mm)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01302-S3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01302-S4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01302-S5

	 Wheel Dia mm)	 Tread Width mm)	 Load Capacity mm)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
	75	32	100	106	8.3	93X67	73X45	2.5	MS01501-F3
	100	32	120	130	8.3	93X67	73X45	2.5	MS01501-F4
	125	32	130	153	8.3	93X67	73X45	2.5	MS01501-F5

	 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Pole Specs mm)	 Thickness mm)	COOE
	75	32	100	106	12X30	2	MS01305-SB3
	100	32	120	131	12X30	2	MS01305-SB4
	125	32	130	156	12X30	2	MS01305-SB5

	 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Pole Specs mm)	 Thickness mm)	COOE
	75	32	100	106	12X30	2	MS01304-SS3
	100	32	120	131	12X30	2	MS01304-SS4
	125	32	130	156	12X30	2	MS01304-SS5

Black industrial caster Wheel

工业小脚轮 <<<

- High quality galvanized support

■ Single wheel rubber material
- 优质镀锌支架

■ 单轮橡胶材质



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	23	50	96	8.3	81.5X70	61X44	1.5	IR036XY-B3
100	30	70	129	8.3	100X81	78X58	2	IR036XY-B4
125	32	80	150	8.3	100X81	78X58	2	IR036XY-B5
150	39	120	195	11	135X107	103X74	2.5	IR036XY-B6
200	45	130	232	11	135X107	103X74	2.5	IR036XY-B8
250	50	150	273	11	135X107	103X74	2.5	IR036XY-B10



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	23	50	96	8.3	81.5X70	61X44	1.5	IR036XY-S3
100	30	70	129	8.3	100X81	78X58	2	IR036XY-S4
125	32	80	150	8.3	100X81	78X58	2	IR036XY-S5
150	39	120	195	11	135X107	103X74	2.5	IR036XY-S6
200	45	130	232	11	135X107	103X74	2.5	IR036XY-S8
250	50	150	273	11	135X107	103X74	2.5	IR036XY-S10



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	23	50	96	8.3	81.5X70	61X44	1.5	IR036XY-F3
100	30	70	129	8.3	100X81	78X58	2	IR036XY-F4
125	32	80	150	8.3	100X81	78X58	2	IR036XY-F5
150	39	120	195	11	135X107	103X74	2.5	IR036XY-F6
200	45	130	232	11	135X107	103X74	2.5	IR036XY-F8
250	50	150	273	11	135X107	103X74	2.5	IR036XY-F10

Medium duty pvc(Korean)
caster wheel

中型韩式轮 <<<

- High quality galvanized support

■ Single wheel PVC material

■ Single ball bearing
- 优质镀锌支架

■ 单轮PVC材质

■ 单滚珠轴承



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	32	100	106	8.3	93X67	73X45	2.5	RS01303-B3
100	32	120	130	8.3	93X67	73X45	2.5	RS01303-B4
125	32	130	153	8.3	93X67	73X45	2.5	RS01303-B5



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	32	100	106	8.3	93X67	73X45	2.5	RS01303-S3
100	32	120	130	8.3	93X67	73X45	2.5	RS01303-S4
125	32	130	153	8.3	93X67	73X45	2.5	RS01303-S5



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	32	100	106	8.3	93X67	73X45	2.5	RS01303-F3
100	32	120	130	8.3	93X67	73X45	2.5	RS01303-F4
125	32	130	153	8.3	93X67	73X45	2.5	RS01303-F5

Gray Rubber(PVC)
Caster wheel

- High quality galvanized support
- Single wheel Rubber (PVC)material
- 优质镀锌支架
- 单轮橡胶(PVC)材质



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
50	17	35	68	9	50X50	34X34	2	JD057XY-B2
65	21	45	88	9	65X65	50X50	2	JD057XY-B2.5
75	21	50	100	9	65X65	50X50	2	JD057XY-B3
100	27	70	130	9	76X76	60X60	2	JD057XY-B4
125	27	90	155	9	76X76	60X60	2	JD057XY-B5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
50	17	35	68	9	50X50	34X34	2	JD057XY-S2
65	21	45	88	9	65X65	50X50	2	JD057XY-S2.5
75	21	50	100	9	65X65	50X50	2	JD057XY-S3
100	27	70	130	9	76X76	60X60	2	JD057XY-S4
125	27	90	155	9	76X76	60X60	2	JD057XY-S5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
50	17	35	68	9	65X49	53X33	2	JD057XY-F2
65	21	45	88	9	65X49	53X33	2	JD057XY-F2.5
75	21	50	100	9	101X60	81X40	2	JD057XY-F3
100	27	70	130	9	101X60	81X40	2	JD057XY-F4
125	27	90	155	9	101X60	81X40	2	JD057XY-F5

灰胶轮 <<<



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
50	17	35	68	12X30	2	JD057XY-SB2
65	21	45	88	12X30	2	JD057XY-SB2.5
75	21	50	100	12X30	2	JD057XY-SB3
100	27	70	130	12X30	2	JD057XY-SB4
125	27	90	155	12X30	2	JD057XY-SB5



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Pole Specs (mm)	 Thickness (mm)	COOE
50	17	35	68	12X30	2	JD057XY-SS2
65	21	45	88	12X30	2	JD057XY-SS2.5
75	21	50	100	12X30	2	JD057XY-SS3
100	27	70	130	12X30	2	JD057XY-SS4
125	27	90	155	12X30	2	JD057XY-SS5

Blue Elastic industrial caster wheel 蓝色橡胶工业脚轮 <<<

- High quality galvanized support
- Single wheel rubber material
- 优质镀锌支架
- 单轮橡胶材质



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	36	50	96	8.3	81.5X70	61X44	1.5	EIR036XY-B3
100	36	70	129	8.3	100X81	78X58	2	EIR036XY-B4
125	36	100	150	8.3	100X81	78X58	2	EIR036XY-B5
150	50	150	195	11	135X107	103X74	2.5	EIR036XY-B6
200	50	180	232	11	135X107	103X74	2.5	EIR036XY-B8



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	36	50	96	8.3	81.5X70	61X44	2	EIR036XY-S3
100	36	70	129	8.3	100X81	78X58	2	EIR036XY-S4
125	36	100	150	8.3	100X81	78X58	2	EIR036XY-S5
150	50	150	195	11	135X107	103X74	2.5	EIR036XY-S6
200	50	180	232	11	135X107	103X74	2.5	EIR036XY-S8



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	36	50	96	8.3	81.5X70	61X44	2	EIR036XY-F3
100	36	70	129	8.3	100X81	78X58	2	EIR036XY-F4
125	36	100	150	8.3	100X81	78X58	2	EIR036XY-F5
150	50	150	195	11	135X107	103X74	2.5	EIR036XY-F6
200	50	180	232	11	135X107	103X74	2.5	EIR036XY-F8

Medium-sized biaxial arc-shaped brown mute 中型双轴弧形啡色 超静音 <<<

- High quality electrophoretic scaffold
- Single wheel TPR material
- Double ball bearing
- 优质电泳支架
- 单轮TPR材质
- 双滚珠轴承



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	100	105	8.3	94X64	74X45	2.5	CB01303-B1
100	32	110	130	8.3	94X64	74X45	2.5	CB01303-B2
125	32	120	155	8.3	94X64	74X45	2.5	CB01303-B3



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	100	105	8.3	94X64	74X45	2.5	CB01303-S1
100	32	110	130	8.3	94X64	74X45	2.5	CB01303-S2
125	32	120	155	8.3	94X64	74X45	2.5	CB01303-S3



 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Hole Dia (mm)	 Plate Size (mm)	 Hole distance (mm)	 Thickness (mm)	COOE
75	32	100	105	8.3	94X64	74X45	2.5	CB01303-F1
100	32	110	130	8.3	94X64	74X45	2.5	CB01303-F2
125	32	120	155	8.3	94X64	74X45	2.5	CB01303-F3

Medium-sized biaxial arc-shaped brown mute

- High quality galvanized support

■ Single wheel TPR material

■ Double ball bearing
- 优质镀锌支架

■ 单轮TPR材质

■ 双滚珠轴承



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	32	100	105	8.3	94X64	74X45	2.5	ME01303-B1
100	32	110	130	8.3	94X64	74X45	2.5	ME01303-B2
125	32	120	155	8.3	94X64	74X45	2.5	ME01303-B3

中型双轴弧形啡色 <<<
超静音



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	32	100	105	8.3	94X64	74X45	2.5	ME01303-S1
100	32	110	130	8.3	94X64	74X45	2.5	ME01303-S2
125	32	120	155	8.3	94X64	74X45	2.5	ME01303-S3



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	32	100	105	8.3	94X64	74X45	2.5	ME01303-F1
100	32	110	130	8.3	94X64	74X45	2.5	ME01303-F2
125	32	120	155	8.3	94X64	74X45	2.5	ME01303-F3

Medium-sized electrophoretic scaffold

- High quality electrophoretic scaffold

■ Single wheel TPU material

■ Double ball bearing
- 优质电泳支架

■ 单轮TPU材质

■ 双滚珠轴承



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	32	100	105	8.3	94X64	74X45	2.5	YE01303-B1
100	32	110	130	8.3	94X64	74X45	2.5	YE01303-B2
125	32	120	155	8.3	94X64	74X45	2.5	YE01303-B3



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	32	100	105	8.3	94X64	74X45	2.5	YE01303-S1
100	32	110	130	8.3	94X64	74X45	2.5	YE01303-S2
125	32	120	155	8.3	94X64	74X45	2.5	YE01303-S3



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Hole Dia mm)	 Plate Size mm)	 Hole distance mm)	 Thickness mm)	COOE
75	32	100	105	8.3	94X64	74X45	2.5	YE01303-F1
100	32	110	130	8.3	94X64	74X45	2.5	YE01303-F2
125	32	120	155	8.3	94X64	74X45	2.5	YE01303-F3



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Pole Specs mm)	 Thickness mm)	COOE
75	32	100	110	12X30	3	YE01303-SS1
100	32	110	133	12X30	3	YE01303-SS2
125	32	120	158	12X30	3	YE01303-SS3



 Wheel Dia mm)	 Tread Width mm)	 Load Capacity kg)	 Load Height mm)	 Pole Specs mm)	 Thickness mm)	COOE
75	32	100	110	12X30	3	YE01303-SB1
100	32	110	133	12X30	3	YE01303-SB2
125	32	120	158	12X30	3	YE01303-SB3

06

Stainless steel series 不锈钢系列

Heavy duty stainless steel TPR on cast iron

耐高温不锈钢<<<

- High quality 304 stainless steel
- Single wheel TPR material
- Single bearing
- 优质304不锈钢支架
- 单轮TPR材质
- 单轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
200	50	300	243	11	115X100	83X71	5	SS 037XY-S8



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
200	50	300	243	11	115X100	83X71	5	SS 037XY-F8

Medium duty TPR
stainless steel

- High quality 304 stainless steel

■ Single wheel TPR material

■ Single bearing
- 优质304不锈钢支架

■ 单轮TPR材质

■ 单轴承

中型不锈钢TPR轮<<<

										COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	Bolt Hole 孔顶 (mm)	
	75	32	100	116	8	95X70	74X48	2.5	12	SS004XY-B3
	100	32	120	137	8	95X70	74X48	2.5	12	SS004XY-B4
	125	32	130	165	8	95X70	74X48	2.5	12	SS004XY-B5

										COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	Bolt Hole 孔顶 (mm)	
	75	32	100	116	8	95X70	74X48	2.5	12	SS004XY-B3-1
	100	32	120	137	8	95X70	74X48	2.5	12	SS004XY-B4-1
	125	32	130	165	8	95X70	74X48	2.5	12	SS004XY-B5-1

										COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	Bolt Hole 孔顶 (mm)	
	75	32	100	116	8	95X70	74X48	2.5	12	SS004XY-S3
	100	32	120	137	8	95X70	74X48	2.5	12	SS004XY-S4
	125	32	130	165	8	95X70	74X48	2.5	12	SS004XY-S5

									COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	
	75	32	100	116	8	95X70	74X48	2.5	SS004XY-F-3
	100	32	120	137	8	95X70	74X48	2.5	SS004XY-F-4
	125	32	130	165	8	95X70	74X48	2.5	SS004XY-F-5

								COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Thickness 支架厚度 (mm)	Bolt Hole 孔顶 (mm)	
	75	32	100	116	8	3	12	SS004XY-HB-3
	100	32	120	137	8	3	12	SS004XY-HB-4
	125	32	130	165	8	3	12	SS004XY-HB-5

								COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Thickness 支架厚度 (mm)	Bolt Hole 孔顶 (mm)	
	75	32	100	116	8	3	12	SS004XY-HS-3
	100	32	120	137	8	3	12	SS004XY-HS-4
	125	32	130	165	8	3	12	SS004XY-HS-5

07

Medium and heavy duty series 中重型系列



Medium and heavy duty Rubber caster wheel

中重镀金风火轮 <<<

- High quality galvanized support
- Single wheel rubber material
- Double ball bearing
- 优质镀锌支架
- 单轮橡胶材质
- 双滚珠轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
75	32	150	107	8.3	94X68	45X75	5	MW02102-S3
100	32	180	132	8.3	94X68	45X75	5	MW02102-S4



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
75	32	150	107	8.3	94X68	45X75	5	MW02101-F3
100	32	180	132	8.3	94X68	45X75	5	MW02101-F4

Medium and heavy duty
Nylon caster wheel

中重型尼龙轮 <<<

- High quality galvanized support

■ Single wheel nylon material

■ Double ball bearing
- 优质镀锌支架

■ 单轮尼龙材质

■ 双滚珠轴承

									CODE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	
	75	33	200	107	8.3	94X68	45X75	5	
	100	33	230	132	8.3	94X68	45X75	5	MW01902-S4

									CODE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	
	75	33	200	107	8.3	94X68	45X75	5	
	100	33	230	132	8.3	94X68	45X75	5	MW01901-F4

Medium and heavy duty
PU on cast iron

中重铁芯PU轮 <<<

- High quality galvanized support

■ Single wheel PU material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PU材质

■ 双滚珠轴承

									CODE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	
	75	32	200	107	8.3	94X68	45X75	5	
	100	32	230	132	8.3	94X68	45X75	5	MW01102-S4

									CODE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	
	75	32	200	107	8.3	94X68	45X75	5	
	100	32	230	132	8.3	94X68	45X75	5	MW01101-F4

08

Heavy duty series
重型系列



Heavy duty PU on cast iron
(Korean)caster wheel

重型韩式轮 <<<

- High quality galvanized support

■ Single wheel PU material

■ Needle roller bearing
- 优质镀锌支架

■ 单轮PU轮

■ 滚针轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
100	35	250	145	11	115X100	83X71	5.5	RW01403-B4
125	41	290	168	11	115X100	83X71	5.5	RW01403-B5
150	46	330	197	11	115X100	83X71	5.5	RW01403-B6
200	46	380	240	11	115X100	83X71	5.5	RW01403-B8



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
100	35	250	145	11	115X100	83X71	5.5	RW01402-S4
125	41	290	168	11	115X100	83X71	5.5	RW01402-S5
150	46	330	197	11	115X100	83X71	5.5	RW01402-S6
200	46	380	240	11	115X100	83X71	5.5	RW01402-S8



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
100	35	250	145	11	115X100	83X71	5.5	RW01401-F4
125	41	290	168	11	115X100	83X71	5.5	RW01401-F5
150	46	330	197	11	115X100	83X71	5.5	RW01401-F6
200	46	380	240	11	115X100	83X71	5.5	RW01401-F8

Heavy duty PP caster wheel

重型欧式PP轮<<<

- High quality galvanized support

■ Single wheel PP material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PP材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
80	30	200	108	14X9	105X88	80X60	2.5	45080BNYF-B
100	30	250	128	14X9	105X88	80X60	2.5	45100BNYF-B
125	30	300	155	14X9	105X88	80X60	2.5	45125SBNYF-B
125	40	350	156	16X11	135X113	105X80	2.5	45125MBNYF-B
160	45	400	195	16X11	135X114	105X80	2.5	45160BNYF-B
200	50	400	240	16X11	135X114	105X80	2.5	45200BNYF-B



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
80	30	200	108	14X9	105X88	80X60	2.5	45080BNYF-S
100	30	250	128	14X9	105X88	80X60	2.5	45100BNYF-S
125	30	300	155	14X9	105X88	80X60	2.5	45125SBNYF-S
125	40	350	156	16X11	135X113	105X80	2.5	45125MBNYF-S
160	45	400	195	16X11	135X114	105X80	2.5	45160BNYF-S
200	50	400	240	16X11	135X114	105X80	2.5	45200BNYF-S



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
80	30	200	108	14X9	105X88	80X60	2.5	45080BNYF-F
100	30	250	128	14X9	105X88	80X60	2.5	45100BNYF-F
125	30	300	155	14X9	105X88	80X60	2.5	45125SBNYF-F
125	40	350	156	16X11	135X113	105X80	2.5	45125MBNYF-F
160	45	400	195	16X11	135X114	105X80	2.5	45160BNYF-F
200	50	400	240	16X11	135X114	105X80	2.5	45200BNYF-F

Heavy duty Nylon caster wheel

重型欧式尼龙轮<<<

- High quality galvanized support

■ Single wheel Nylon material

■ Double ball bearing
- 优质镀锌支架

■ 单轮尼龙材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
80	30	200	108	14X9	105X88	80X60	2.5	45080BNYF-NB
100	30	250	128	14X9	105X88	80X60	2.5	45100BNYF-NB
125	30	300	155	14X9	105X88	80X60	2.5	45125SBNYF-NB
125	40	350	156	16X11	135X113	105X80	2.5	45125MBNYF-NB
160	45	400	195	16X11	135X114	105X80	2.5	45160BNYF-NB
200	50	400	240	16X11	135X114	105X80	2.5	45200BNYF-NB



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
80	30	200	108	14X9	105X88	80X60	2.5	45080BNYF-NS
100	30	250	128	14X9	105X88	80X60	2.5	45100BNYF-NS
125	30	300	155	14X9	105X88	80X60	2.5	45125SBNYF-NS
125	40	350	156	16X11	135X113	105X80	2.5	45125MBNYF-NS
160	45	400	195	16X11	135X114	105X80	2.5	45160BNYF-NS
200	50	400	240	16X11	135X114	105X80	2.5	45200BNYF-NS



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
80	30	200	108	14X9	105X88	80X60	2.5	45080BNYF-NF
100	30	250	128	14X9	105X88	80X60	2.5	45100BNYF-NF
125	30	300	155	14X9	105X88	80X60	2.5	45125SBNYF-NF
125	40	350	156	16X11	135X113	105X80	2.5	45125MBNYF-NF
160	45	400	195	16X11	135X114	105X80	2.5	45160BNYF-NF
200	50	400	240	16X11	135X114	105X80	2.5	45200BNYF-NF

Heavy duty TPR caster wheel A

重型超人胶轮 <<<

- High quality galvanized support

■ Single wheel TPR material

■ Double ball bearing
- 优质镀锌支架

■ 单轮TPR材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	180	145	11	115X100	83X71	5.5	MW01603-B4
125	50	200	168	11	115X100	83X71	5.5	MW01603-B5
150	50	250	197	11	115X100	83X71	5.5	MW01603-B6
200	50	280	240	11	115X100	83X71	5.5	MW01603-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	180	145	11	115X100	83X71	5.5	MW01602-S4
125	50	200	168	11	115X100	83X71	5.5	MW01602-S5
150	50	250	197	11	115X100	83X71	5.5	MW01602-S6
200	50	280	240	11	115X100	83X71	5.5	MW01602-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	180	145	11	115X100	83X71	5.5	MW01601-F4
125	50	200	168	11	115X100	83X71	5.5	MW01601-F5
150	50	250	197	11	115X100	83X71	5.5	MW01601-F6
200	50	280	240	11	115X100	83X71	5.5	MW01601-F8

Heavy duty TPR caster whee B

方边超人胶轮 <<<

- High quality galvanized support

■ Single wheel TPR material

■ Double ball bearing
- 优质镀锌支架

■ 单轮TPR材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	200	146	11	115X100	83X71	5.5	MW13003-B4
125	52	220	168	11	115X100	83X71	5.5	MW13003-B5
150	52	270	195	11	115X100	83X71	5.5	MW13003-B6
200	52	300	243	11	115X100	83X71	5.5	MW13003-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	200	146	11	115X100	83X71	5.5	MW13002-S4
125	52	220	168	11	115X100	83X71	5.5	MW13002-S5
150	52	270	195	11	115X100	83X71	5.5	MW13002-S6
200	52	300	243	11	115X100	83X71	5.5	MW13002-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	200	146	11	115X100	83X71	5.5	MW13001-F4
125	52	220	168	11	115X100	83X71	5.5	MW13001-F5
150	52	270	195	11	115X100	83X71	5.5	MW13001-F6
200	52	300	243	11	115X100	83X71	5.5	MW13001-F8

Heavy duty thickened Nylon caster wheel

- High quality galvanized support

■ Single wheel Nylon material

■ Double ball bearing
- 优质镀锌支架

■ 单轮尼龙材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	45	220	145	11	115X100	83X71	5.5	MW01203-B4
125	45	250	168	11	115X100	83X71	5.5	MW01203-B5
150	45	280	197	11	115X100	83X71	5.5	MW01203-B6
200	45	300	240	11	115X100	83X71	5.5	MW01203-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	45	220	145	11	115X100	83X71	5.5	MW01202-S4
125	45	250	168	11	115X100	83X71	5.5	MW01202-S5
150	45	280	197	11	115X100	83X71	5.5	MW01202-S6
200	45	300	240	11	115X100	83X71	5.5	MW01202-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	45	220	145	11	115X100	83X71	5.5	MW01201-F4
125	45	250	168	11	115X100	83X71	5.5	MW01201-F5
150	45	280	197	11	115X100	83X71	5.5	MW01201-F6
200	45	300	240	11	115X100	83X71	5.5	MW01201-F8

重型加厚尼龙轮 <<<

Heavy duty PVC caster wheel A

- High quality galvanized support

■ Single wheel PVC material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PVC材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01103-B4
125	50	220	168	11	115X100	83X71	5.5	MW01103-B5
150	50	250	197	11	115X100	83X71	5.5	MW01103-B6
200	50	280	240	11	115X100	83X71	5.5	MW01103-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01102-S4
125	50	220	168	11	115X100	83X71	5.5	MW01102-S5
150	50	250	197	11	115X100	83X71	5.5	MW01102-S6
200	50	280	240	11	115X100	83X71	5.5	MW01102-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01101-F4
125	50	220	168	11	115X100	83X71	5.5	MW01101-F5
150	50	250	197	11	115X100	83X71	5.5	MW01101-F6
200	50	280	240	11	115X100	83X71	5.5	MW01101-F8

重型高强度风火轮 <<<

Heavy duty dark red
PVC caster wheel

重型枣红PVC轮 <<<

- High quality galvanized support

■ Single wheel PVC material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PVC材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01303-B4
125	50	230	168	11	115X100	83X71	5.5	MW01303-B5
150	50	250	197	11	115X100	83X71	5.5	MW01303-B6
200	50	280	240	11	115X100	83X71	5.5	MW01303-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01302-S4
125	50	230	168	11	115X100	83X71	5.5	MW01302-S5
150	50	250	197	11	115X100	83X71	5.5	MW01302-S6
200	50	280	240	11	115X100	83X71	5.5	MW01302-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01301-F4
125	50	230	168	11	115X100	83X71	5.5	MW01301-F5
150	50	250	197	11	115X100	83X71	5.5	MW01301-F6
200	50	280	240	11	115X100	83X71	5.5	MW01301-F8

Heavy duty
PVC(PU) on cast PP
(Korean)caster wheel

重型韩式轮 <<<

- High quality galvanized support

■ Single wheel PVC material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PVC材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01803-B4
125	50	220	168	11	115X100	83X71	5.5	MW01803-B5
150	50	250	197	11	115X100	83X71	5.5	MW01803-B6
200	50	280	240	11	115X100	83X71	5.5	MW01803-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01802-S4
125	50	220	168	11	115X100	83X71	5.5	MW01802-S5
150	50	250	197	11	115X100	83X71	5.5	MW01802-S6
200	50	280	240	11	115X100	83X71	5.5	MW01802-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01801-F4
125	50	220	168	11	115X100	83X71	5.5	MW01801-F5
150	50	250	197	11	115X100	83X71	5.5	MW01801-F6
200	50	280	240	11	115X100	83X71	5.5	MW01801-F8

Heavy duty PU on cast iron

重型铁芯PU轮 <<<

- High quality galvanized support

■ Single wheel PU material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PU材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	250	145	11	115X100	83X71	5.5	MW01703-B4
125	50	290	168	11	115X100	83X71	5.5	MW01703-B5
150	50	330	197	11	115X100	83X71	5.5	MW01703-B6
200	50	380	240	11	115X100	83X71	5.5	MW01703-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	250	145	11	115X100	83X71	5.5	MW01702-S4
125	50	290	168	11	115X100	83X71	5.5	MW01702-S5
150	50	330	197	11	115X100	83X71	5.5	MW01702-S6
200	50	380	240	11	115X100	83X71	5.5	MW01702-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	250	145	11	115X100	83X71	5.5	MW01701-F4
125	50	290	168	11	115X100	83X71	5.5	MW01701-F5
150	50	330	197	11	115X100	83X71	5.5	MW01701-F6
200	50	380	240	11	115X100	83X71	5.5	MW01701-F8

Heavy duty Rubber
on cast iron

重型铁芯弹力轮 <<<

- High quality galvanized support

■ Single wheel rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮橡胶材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01503-B4
125	50	220	168	11	115X100	83X71	5.5	MW01503-B5
150	50	250	197	11	115X100	83X71	5.5	MW01503-B6
200	50	280	240	11	115X100	83X71	5.5	MW01503-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01502-S4
125	50	220	168	11	115X100	83X71	5.5	MW01502-S5
150	50	250	197	11	115X100	83X71	5.5	MW01502-S6
200	50	280	240	11	115X100	83X71	5.5	MW01502-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01501-F4
125	50	220	168	11	115X100	83X71	5.5	MW01501-F5
150	50	250	197	11	115X100	83X71	5.5	MW01501-F6
200	50	280	240	11	115X100	83X71	5.5	MW01501-F8

Heavy duty
Rubber on cast PP

重型塑芯弹力轮 <<<

- High quality galvanized support

■ Single wheel rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮橡胶材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01403-B4
125	50	220	168	11	115X100	83X71	5.5	MW01403-B5
150	50	250	197	11	115X100	83X71	5.5	MW01403-B6
200	50	280	240	11	115X100	83X71	5.5	MW01403-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01402-S4
125	50	220	168	11	115X100	83X71	5.5	MW01402-S5
150	50	250	197	11	115X100	83X71	5.5	MW01402-S6
200	50	280	240	11	115X100	83X71	5.5	MW01402-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	200	145	11	115X100	83X71	5.5	MW01401-F4
125	50	220	168	11	115X100	83X71	5.5	MW01401-F5
150	50	250	197	11	115X100	83X71	5.5	MW01401-F6
200	50	280	240	11	115X100	83X71	5.5	MW01401-F8

Heavy duty Golden bracket
TPR caster wheel
Bangwang

小霸王 <<<

- High quality galvanized support

■ Single wheel TPR material

■ Double ball bearing
- 优质镀锌支架

■ 单轮TPR材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	200	146	11	115X100	83X71	6	MS02301-B4
125	52	220	168	11	115X100	83X71	6	MS02301-B5
150	52	270	195	11	115X100	83X71	6	MS02301-B6
200	52	300	243	11	115X100	83X71	6	MS02301-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	200	146	11	115X100	83X71	6	MS02302-S4
125	52	220	168	11	115X100	83X71	6	MS02302-S5
150	52	270	195	11	115X100	83X71	6	MS02302-S6
200	52	300	243	11	115X100	83X71	6	MS02302-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	200	146	11	115X100	83X71	6	MS02303-F4
125	52	220	168	11	115X100	83X71	6	MS02303-F5
150	52	270	195	11	115X100	83X71	6	MS02303-F6
200	52	300	243	11	115X100	83X71	6	MS02303-F8



MS02401



MS02402



MS02403

Heavy duty Golden bracket
Nylon caster wheel
KingKong

金刚 <<<

- High quality galvanized support

■ Single wheel nylon material

■ Double ball bearing
- 优质镀锌支架

■ 单轮尼龙材质

■ 双滚珠轴承

								COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	
100	52	280	146	11	115X100	83X71	6	MS02101-B4
125	52	300	168	11	115X100	83X71	6	MS02101-B5
150	52	420	195	11	115X100	83X71	6	MS02101-B6
200	52	450	243	11	115X100	83X71	6	MS02101-B8

								COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	
100	52	280	146	11	115X100	83X71	6	MS02102-S4
125	52	300	168	11	115X100	83X71	6	MS02102-S5
150	52	420	195	11	115X100	83X71	6	MS02102-S6
200	52	450	243	11	115X100	83X71	6	MS02102-S8

								COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	
100	52	280	146	11	115X100	83X71	6	MS02103-F4
125	52	300	168	11	115X100	83X71	6	MS02103-F5
150	52	420	195	11	115X100	83X71	6	MS02103-F6
200	52	450	243	11	115X100	83X71	6	MS02103-F8



MS20201



MS20202



MS20203

Heavy duty Golden bracket
PU caster wheel
Endurance

耐力 <<<

- High quality galvanized support

■ Single wheel PU material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PU材质

■ 双滚珠轴承

								COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	
100	52	220	146	11	115X100	83X71	6	MS02801-B4
125	52	250	168	11	115X100	83X71	6	MS02801-B5
150	52	280	195	11	115X100	83X71	6	MS02801-B6
200	52	330	243	11	115X100	83X71	6	MS02801-B8

								COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	
100	52	220	146	11	115X100	83X71	6	MS02802-S4
125	52	250	168	11	115X100	83X71	6	MS02802-S5
150	52	280	195	11	115X100	83X71	6	MS02802-S6
200	52	330	243	11	115X100	83X71	6	MS02802-S8

								COOE
Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	
100	52	220	146	11	115X100	83X71	6	MS02803-F4
125	52	250	168	11	115X100	83X71	6	MS02803-F5
150	52	280	195	11	115X100	83X71	6	MS02803-F6
200	52	330	243	11	115X100	83X71	6	MS02803-F8

Heavy duty Golden bracket PU caster wheel Tamron

腾龙 <<<

- High quality galvanized support

■ Single wheel PU material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PU材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	220	146	11	115X100	83X71	6	MS02601-B4
125	52	250	168	11	115X100	83X71	6	MS02601-B5
150	52	280	195	11	115X100	83X71	6	MS02601-B6
200	52	330	243	11	115X100	83X71	6	MS02601-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	220	146	11	115X100	83X71	6	MS02602-S4
125	52	250	168	11	115X100	83X71	6	MS02602-S5
150	52	280	195	11	115X100	83X71	6	MS02602-S6
200	52	330	243	11	115X100	83X71	6	MS02602-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	220	146	11	115X100	83X71	6	MS02603-F4
125	52	250	168	11	115X100	83X71	6	MS02603-F5
150	52	280	195	11	115X100	83X71	6	MS02603-F6
200	52	330	243	11	115X100	83X71	6	MS02603-F8

Heavy duty Golden bracket PU caster wheel Yaron

亚龙 <<<

- High quality galvanized support

■ Single wheel TPR material

■ Double ball bearing
- 优质镀锌支架

■ 单轮TPR材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	200	146	11	115X100	83X71	6	MS02501-B4
125	52	220	168	11	115X100	83X71	6	MS02501-B5
150	52	270	195	11	115X100	83X71	6	MS02501-B6
200	52	300	243	11	115X100	83X71	6	MS02501-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	200	146	11	115X100	83X71	6	MS02502-S4
125	52	220	168	11	115X100	83X71	6	MS02502-S5
150	52	270	195	11	115X100	83X71	6	MS02502-S6
200	52	300	243	11	115X100	83X71	6	MS02502-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	200	146	11	115X100	83X71	6	MS02503-F4
125	52	220	168	11	115X100	83X71	6	MS02503-F5
150	52	270	195	11	115X100	83X71	6	MS02503-F6
200	52	300	243	11	115X100	83X71	6	MS02503-F8

Heavy duty Golden bracket Rubber on cast steel

- High quality galvanized support

■ Single wheel steel core rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮钢芯橡胶材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	220	146	11	115X100	83X71	6	MS02211-B4
125	52	250	168	11	115X100	83X71	6	MS02211-B5
150	52	280	195	11	115X100	83X71	6	MS02211-B6
200	52	330	243	11	115X100	83X71	6	MS02211-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	220	146	11	115X100	83X71	6	MS02212-S4
125	52	250	168	11	115X100	83X71	6	MS02212-S5
150	52	280	195	11	115X100	83X71	6	MS02212-S6
200	52	330	243	11	115X100	83X71	6	MS02212-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	220	146	11	115X100	83X71	6	MS02213-F4
125	52	250	168	11	115X100	83X71	6	MS02213-F5
150	52	280	195	11	115X100	83X71	6	MS02213-F6
200	52	330	243	11	115X100	83X71	6	MS02213-F8

钢芯弹力轮 <<<

Heavy duty Golden bracket Rubber on cast Aluminum

- High quality galvanized support

■ Aluminum core rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮铝芯橡胶材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	52	230	146	11	115X100	83X71	6	MS02311-B4
125	52	280	168	11	115X100	83X71	6	MS02311-B5
150	52	320	195	11	115X100	83X71	6	MS02311-B6
200	52	380	243	11	115X100	83X71	6	MS02311-B8

Heavy duty Golden bracket Rubber caster wheel Michilin

- High quality galvanized support

■ Single wheel aluminum core rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮铝芯橡胶材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
125	52	280	168	11	115X100	83X71	6	MS02111-B5
150	52	320	195	11	115X100	83X71	6	MS02111-B6
200	52	380	243	11	115X100	83X71	6	MS02111-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
125	52	280	168	11	115X100	83X71	6	MS02112-S5
150	52	320	195	11	115X100	83X71	6	MS02112-S6
200	52	380	243	11	115X100	83X71	6	MS02112-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
125	52	280	168	11	115X100	83X71	6	MS02113-F5
150	52	320	195	11	115X100	83X71	6	MS02113-F6
200	52	380	243	11	115X100	83X71	6	MS02113-F8

铝芯弹力轮 <<<

米淇林 <<<



09

Heavy duty caster wheel
B series
can be used for trolley
可用于配套推车轮

Heavy duty PVC(PU)
Korean caster wheel (5mm)

韩式轮 <<<

- High quality galvanized support
- Single wheel PVC material
- Double ball bearing
- 优质镀锌支架
- 单轮PVC材质
- 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	150	132	11	110X95	81X70	5	MW01805-S4
125	50	180	152	11	110X95	81X70	5	MW01805-S5
150	50	200	187	11	110X95	81X70	5	MW01805-S6
200	50	220	225	11	110X95	81X70	5	MW01805-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	150	132	11	110X95	81X70	5	MW01804-F4
125	50	180	152	11	110X95	81X70	5	MW01804-F5
150	50	200	187	11	110X95	81X70	5	MW01804-F6
200	50	220	225	11	110X95	81X70	5	MW01804-F8

Heavy duty PVC(PU)
caster wheel–dark red

枣红PVC(PU)轮 <<<

- High quality galvanized support

■ Single wheel PVC material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PVC材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	150	132	11	110X95	81X70	5	MW01305-S4
125	50	180	152	11	110X95	81X70	5	MW01305-S5
150	50	200	187	11	110X95	81X70	5	MW01305-S6
200	50	220	225	11	110X95	81X70	5	MW01305-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	50	150	132	11	110X95	81X70	5	MW01304-F4
125	50	180	152	11	110X95	81X70	5	MW01304-F5
150	50	200	187	11	110X95	81X70	5	MW01304-F6
200	50	220	225	11	110X95	81X70	5	MW01304-F8

Heavy duty Rubber on
cast pp caster wheel(5MM)

5厘小架蓝色塑芯
弹力胶轮 <<<

- High quality galvanized support

■ Single wheel rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮橡胶材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
125	52	180	152	11	110X96	78X68	5	MW10002-S5
150	52	200	187	11	110X96	78X68	5	MW10002-S6
200	52	220	225	11	110X96	78X68	5	MW10002-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
125	52	180	152	11	110X96	78X68	5	MW10001-F5
150	52	200	187	11	110X96	78X68	5	MW10001-F6
200	52	220	225	11	110X96	78X68	5	MW10001-F8

Heavy duty Rubber
caster wheel–Grey (5mm)

5厘小架高弹力静音轮 <<<

- High quality galvanized support

■ Single wheel rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮橡胶材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
125	52	180	152	11	110X96	78X68	5	MW12002–S5
150	52	200	187	11	110X96	78X68	5	MW12002–S6
200	52	220	225	11	110X96	78X68	5	MW12002–S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
125	52	180	152	11	110X96	78X68	5	MW12001–F5
150	52	200	187	11	110X96	78X68	5	MW12001–F6
200	52	220	225	11	110X96	78X68	5	MW12001–F8

Heavy duty Rubber
caster wheel –Orange (5mm)

橙色芯风火轮 <<<

- High quality galvanized support

■ Single wheel rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮橡胶材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
125	45	100	160	11	110X96	78X68	5	MW11002–S5
150	45	120	185	11	110X96	78X68	5	MW11002–S6
200	45	150	235	11	110X96	78X68	5	MW11002–S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
125	45	100	160	11	110X96	78X68	5	MW11001–F5
150	45	120	185	11	110X96	78X68	5	MW11001–F6
200	45	150	235	11	110X96	78X68	5	MW11001–F8

Heavy duty Rubber caster wheel A (5mm) A型轮 <<<

- High quality galvanized support

■ Single wheel rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮橡胶材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
97	41	90	127	10	110X96	68X78	5	MW01-202-S4
116	41	100	155	10	110X96	68X78	5	MW01-202-S5
145	45	120	178	10	110X96	68X78	5	MW01-202-S6
190	47	150	228	10	110X96	68X78	5	MW01-202-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
97	41	90	127	10	110X96	68X78	5	MW01-201-F4
116	41	100	155	10	110X96	68X78	5	MW01-201-F5
145	45	120	178	10	110X96	68X78	5	MW01-201-F6
190	47	150	228	10	110X96	68X78	5	MW01-201-F8

Heavy duty Nylon
caster wheel (5mm)

- High quality galvanized support

■ Single wheel PP material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PP材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
90	42	100	125	10	110X96	68X78	5	MW01-302-S4
112	42	120	152	10	110X96	68X78	5	MW01-302-S5
140	42	150	178	10	110X96	68X78	5	MW01-302-S6
180	42	180	222	10	110X96	68X78	5	MW01-302-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
90	42	100	125	10	110X96	68X78	5	MW01-302-F4
112	42	120	152	10	110X96	68X78	5	MW01-302-F5
140	42	150	178	10	110X96	68X78	5	MW01-302-F6
180	42	180	222	10	110X96	68X78	5	MW01-302-F8

Heavy duty Rubber
on cast steel (5mm)

- High quality galvanized support

■ Single wheel rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮橡胶材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
99	44	100	127	10	110X96	68X78	5	MW01-102-S4
131	44	100	160	10	110X96	68X78	5	MW01-102-S5
160	48	120	185	10	110X96	68X78	5	MW01-102-S6
210	54	150	235	10	110X96	68X78	5	MW01-102-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
99	44	100	127	10	110X96	68X78	5	MW01-101-F4
131	44	100	160	10	110X96	68X78	5	MW01-101-F5
160	48	120	185	10	110X96	68X78	5	MW01-101-F6
210	54	150	235	10	110X96	68X78	5	MW01-101-F8



10

Extra-heavy series
超重型系列

Extra heavy steel
caster wheel

超重型全钢轮 <<<

- High quality galvanized support
- Single wheel all steel
- Double ball bearing
- 优质镀锌支架
- 单轮全钢材质
- 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	58	1800	152	13	140X100	110X75	10	MS06402-S4
125	58	2000	176	13	140X100	110X75	10	MS06402-S5
150	58	2200	202	13	140X100	110X75	10	MS06402-S6
200	58	2600	252	13	140X100	110X75	10	MS06402-S8

Extra heavy duty nylon wheel

超重型尼龙轮 <<<

- High quality galvanized support

■ Single wheel nylon material

■ Double ball bearing
- 优质镀锌支架

■ 单轮尼龙材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	57	900	152	13	140X100	110X75	10	MS06203-S4
125	57	1000	176	13	140X100	110X75	10	MS06203-S5
150	57	1200	202	13	140X100	110X75	10	MS06203-S6
200	57	1600	252	13	140X100	110X75	10	MS06203-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	57	900	152	13	140X100	110X75	10	MS06202-F4
125	57	1000	176	13	140X100	110X75	10	MS06202-F5
150	57	1200	202	13	140X100	110X75	10	MS06202-F6
200	57	1600	252	13	140X100	110X75	10	MS06202-F8

Extra heavy PU on cast iron

超重型铁芯PU轮 <<<

- High quality galvanized support

■ Single wheel PU material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PU材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	55	1100	152	13	140X100	110X75	10	MS06303-B4
125	55	1200	176	13	140X100	110X75	10	MS06303-B5
150	55	1400	202	13	140X100	110X75	10	MS06303-B6
200	55	1800	252	13	140X100	110X75	10	MS06303-B8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	55	1100	152	13	140X100	110X75	10	MS06302-S4
125	55	1200	176	13	140X100	110X75	10	MS06302-S5
150	55	1400	202	13	140X100	110X75	10	MS06302-S6
200	55	1800	252	13	140X100	110X75	10	MS06302-S8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
100	55	1100	152	13	140X100	110X75	10	MS06301-F4
125	55	1200	176	13	140X100	110X75	10	MS06301-F5
150	55	1400	202	13	140X100	110X75	10	MS06301-F6
200	55	1800	252	13	140X100	110X75	10	MS06301-F8

11

Low core series
低重芯系列

Low gravity caster wheel
Nylon

低重芯PA轮 <<<

- High quality galvanized support
- Single wheel PAMaterial
- Double ball bearing
- 优质镀锌支架
- 单轮PA材质
- 双滚珠轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
63	50	500	93	11	101X82	73X53	5	LGE19XY-B2.5
75	50	600	104	11	101X82	73X53	5	LGE19XY-B3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
63	50	500	93	11	101X82	73X53	5	LGE19XY-S2.5
75	50	600	104	11	101X82	73X53	5	LGE19XY-S3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
63	50	500	93	11	101X82	73X53	5	LGE19XY-F2.5
75	50	600	104	11	101X82	73X53	5	LGE19XY-F3

Low gravity caster wheel
PP

低重芯PP轮 <<<

- High quality galvanized support

■ Single wheel PP material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PP材质

■ 双滚珠轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
63	40	250	92	9	96X69	73X45	5	NZ009XY-B2.5
75	45	350	106	9	96X69	73X45	5	NZ009XY-B3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
63	40	250	92	9	96X69	73X45	5	NZ009XY-S2.5
75	45	350	106	9	96X69	73X45	5	NZ009XY-S3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
63	40	250	92	9	96X69	73X45	5	NZ009XY-F2.5
75	45	350	106	9	96X69	73X45	5	NZ009XY-F3

Low gravity caster wheel
PP

低重芯PP轮 <<<

- High quality galvanized support

■ Single wheel PP material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PP材质

■ 双滚珠轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
63	40	250	92	9	96X69	73X45	5	NZ008XY-B2.5
75	45	350	106	9	96X69	73X45	5	NZ008XY-B3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
63	40	250	92	9	96X69	73X45	5	NZ008XY-S2.5
75	45	350	106	9	96X69	73X45	5	NZ008XY-S3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
63	40	250	92	9	96X69	73X45	5	NZ008XY-F2.5
75	45	350	106	9	96X69	73X45	5	NZ008XY-F3

Low gravity caster wheel
Nylon

低重芯尼龙轮 <<<

- High quality galvanized support

■ Single wheel nylon material

■ Double ball bearing
- 优质镀锌支架

■ 单轮尼龙材质

■ 双滚珠轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
75	56	250	112	11	115X100	83X71	6	MS03103



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
75	56	250	11211		115X100	83X71	6	MS03102



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
75	56	250	112	11	115X100	83X71	6	MS03101

Low gravity caster wheel
PU on caster iron

低重芯铁芯PU轮 <<<

- High quality galvanized support

■ Single wheel PU material

■ Double ball bearing
- 优质镀锌支架

■ 单轮PU材质

■ 双滚珠轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
75	52	250	112	11	115X100	83X71	6	MS03203



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
75	52	250	112	11	115X100	83X71	6	MS03202



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
75	52	250	112	11	115X100	83X71	6	MS03201

12

Inflatable wheel series
充气轮系列



ChengShin Pneumatic
caster wheel

正新充气轮 <<<

- High quality galvanized support

■ Single wheel rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮橡胶材质

■ 双滚珠轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Hub thickness 轮毂厚度 (mm)	Hub diameter 轮毂孔径 (mm)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
215	62	200	2.0	120	257	11	115X100	83X71	6	MS04102-S8
264	88	300	2.0	300	312	11	115X100	83X71	6	MS04102-S10



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Hub thickness 轮毂厚度 (mm)	Hub diameter 轮毂孔径 (mm)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
215	62	200	2.0	120	257	11	115X100	83X71	6	MS04103-F8
264	88	300	2.0	300	312	11	115X100	83X71	6	MS04103-F10

A grade Pneumatic
caster wheel

A级充气轮 <<<

- High quality galvanized support

■ Single wheel rubber material

■ Double ball bearing
- 优质镀锌支架

■ 单轮橡胶材质

■ 双滚珠轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Hub thickness 轮毂厚度 (mm)	Hub diameter 轮毂孔径 (mm)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
215	62	200	2.0	120	257	11	115X100	83X71	6	MS04202-S8
264	88	300	2.0	300	312	11	115X100	83X71	6	MS04202-S10



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Hub thickness 轮毂厚度 (mm)	Hub diameter 轮毂孔径 (mm)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	COOE
215	62	200	2.0	120	257	11	115X100	83X71	6	MS04203-S8
264	88	300	2.0	300	312	11	115X100	83X71	6	MS04203-S10

13

Scaffolding series
鷹架系列



Scaffold

鷹架 <<<

- High quality galvanized support

■ Single wheel rubber material

Double ball bearing
- 优质镀锌支架

■ 单轮橡胶材质

■ 双滚珠轴承

								COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	Bolt Hole 孔距 (mm)	Thickness 支架厚度 (mm)	
	150	52	280	192	97X35	12.5	5	MS05101-6
								COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	Bolt Hole 孔距 (mm)	Thickness 支架厚度 (mm)	
	150	52	280	192	97X35	12.5	5	MS05201-6
								COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	Bolt Hole 孔距 (mm)	Thickness 支架厚度 (mm)	
	150	52	280	192	97X35	12.5	5	MS05301-6
								COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	Bolt Hole 孔距 (mm)	Thickness 支架厚度 (mm)	
	150	52	280	192	97X35	12.5	5	MS05401-6
								COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	Bolt Hole 孔距 (mm)	Thickness 支架厚度 (mm)	
	150	52	280	192	97X35	12.5	5	MS05501-6
								COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	Bolt Hole 孔距 (mm)	Thickness 支架厚度 (mm)	
	150	52	280	192	97X35	12.5	5	MS05601-6
								COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	Bolt Hole 孔距 (mm)	Thickness 支架厚度 (mm)	
	150	52	280	192	97X35	12.5	5	MS057401-6
								COOE
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Pole Specs 线杆规格 (mm)	Bolt Hole 孔距 (mm)	Thickness 支架厚度 (mm)	
	150	52	280	192	97X35	12.5	5	MS057401-8

14

Shock absorbing
wheel series
减震轮系列



Shock absorbing
caster wheel

减震轮系列 <<<

- High quality galvanized support

■ Single wheel nylon material

■ Double ball bearing
- 优质镀锌支架

■ 单轮尼龙材质

■ 双滚珠轴承



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	CODE
150	52	500	227	12.7	140X110	107X80	5	MS07402-6
200	52	550	265	12.7	140X110	107X80	5	MS07402-8



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	CODE
150	52	500	227	12.7	140X110	107X80	5	MS07403-6
200	52	550	265	12.7	140X110	107X80	5	MS07403-8



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	CODE
150	52	500	227	12.7	140X110	107X80	5	MS07502-6
200	52	550	265	12.7	140X110	107X80	5	MS07502-8



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	Load Capacity 承重 (kg)	Load Height 安装高度 (mm)	Hole Dia 孔径 (mm)	Plate Size 底板规格 (mm)	Hole distance 孔距 (mm)	Thickness 支架厚度 (mm)	CODE
150	52	500	227	12.7	140X110	107X80	5	MS07503-6
200	52	550	265	12.7	140X110	107X80	5	MS07503-8

Shock absorbing
caster wheel

减震轮系列 <<<

- High quality galvanized support

■ Single wheel nylon material

■ Double ball bearing
- 优质镀锌支架

■ 单轮尼龙材质

■ 双滚珠轴承



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
150	52	500	227	12.7	140X110	107X80	5	MS07602-6
200	52	550	265	12.7	140X110	107X80	5	MS07602-8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
150	52	500	227	12.7	140X110	107X80	5	MS07603-6
200	52	550	265	12.7	140X110	107X80	5	MS07603-8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
150	52	500	227	12.7	140X110	107X80	5	MS07102-6
200	52	550	265	12.7	140X110	107X80	5	MS07102-8

Shock absorbing
caster wheel

减震轮系列 <<<

- High quality galvanized support

■ Single wheel nylon material

■ Double ball bearing
- 优质镀锌支架

■ 单轮尼龙材质

■ 双滚珠轴承




 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
150	52	500	227	12.7	140X110	107X80	5	MS07202-6
200	52	550	265	12.7	140X110	107X80	5	MS07202-8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
150	52	500	227	12.7	140X110	107X80	5	MS07302-6
200	52	550	265	12.7	140X110	107X80	5	MS07302-8



 Wheel Dia 轮径 (mm)	 Tread Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Load Height 安装高度 (mm)	 Hole Dia 孔径 (mm)	 Plate Size 底板规格 (mm)	 Hole distance 孔距 (mm)	 Thickness 支架厚度 (mm)	COOE
150	52	500	227	12.7	140X110	107X80	5	MS07702-6
200	52	550	265	12.7	140X110	107X80	5	MS07702-8

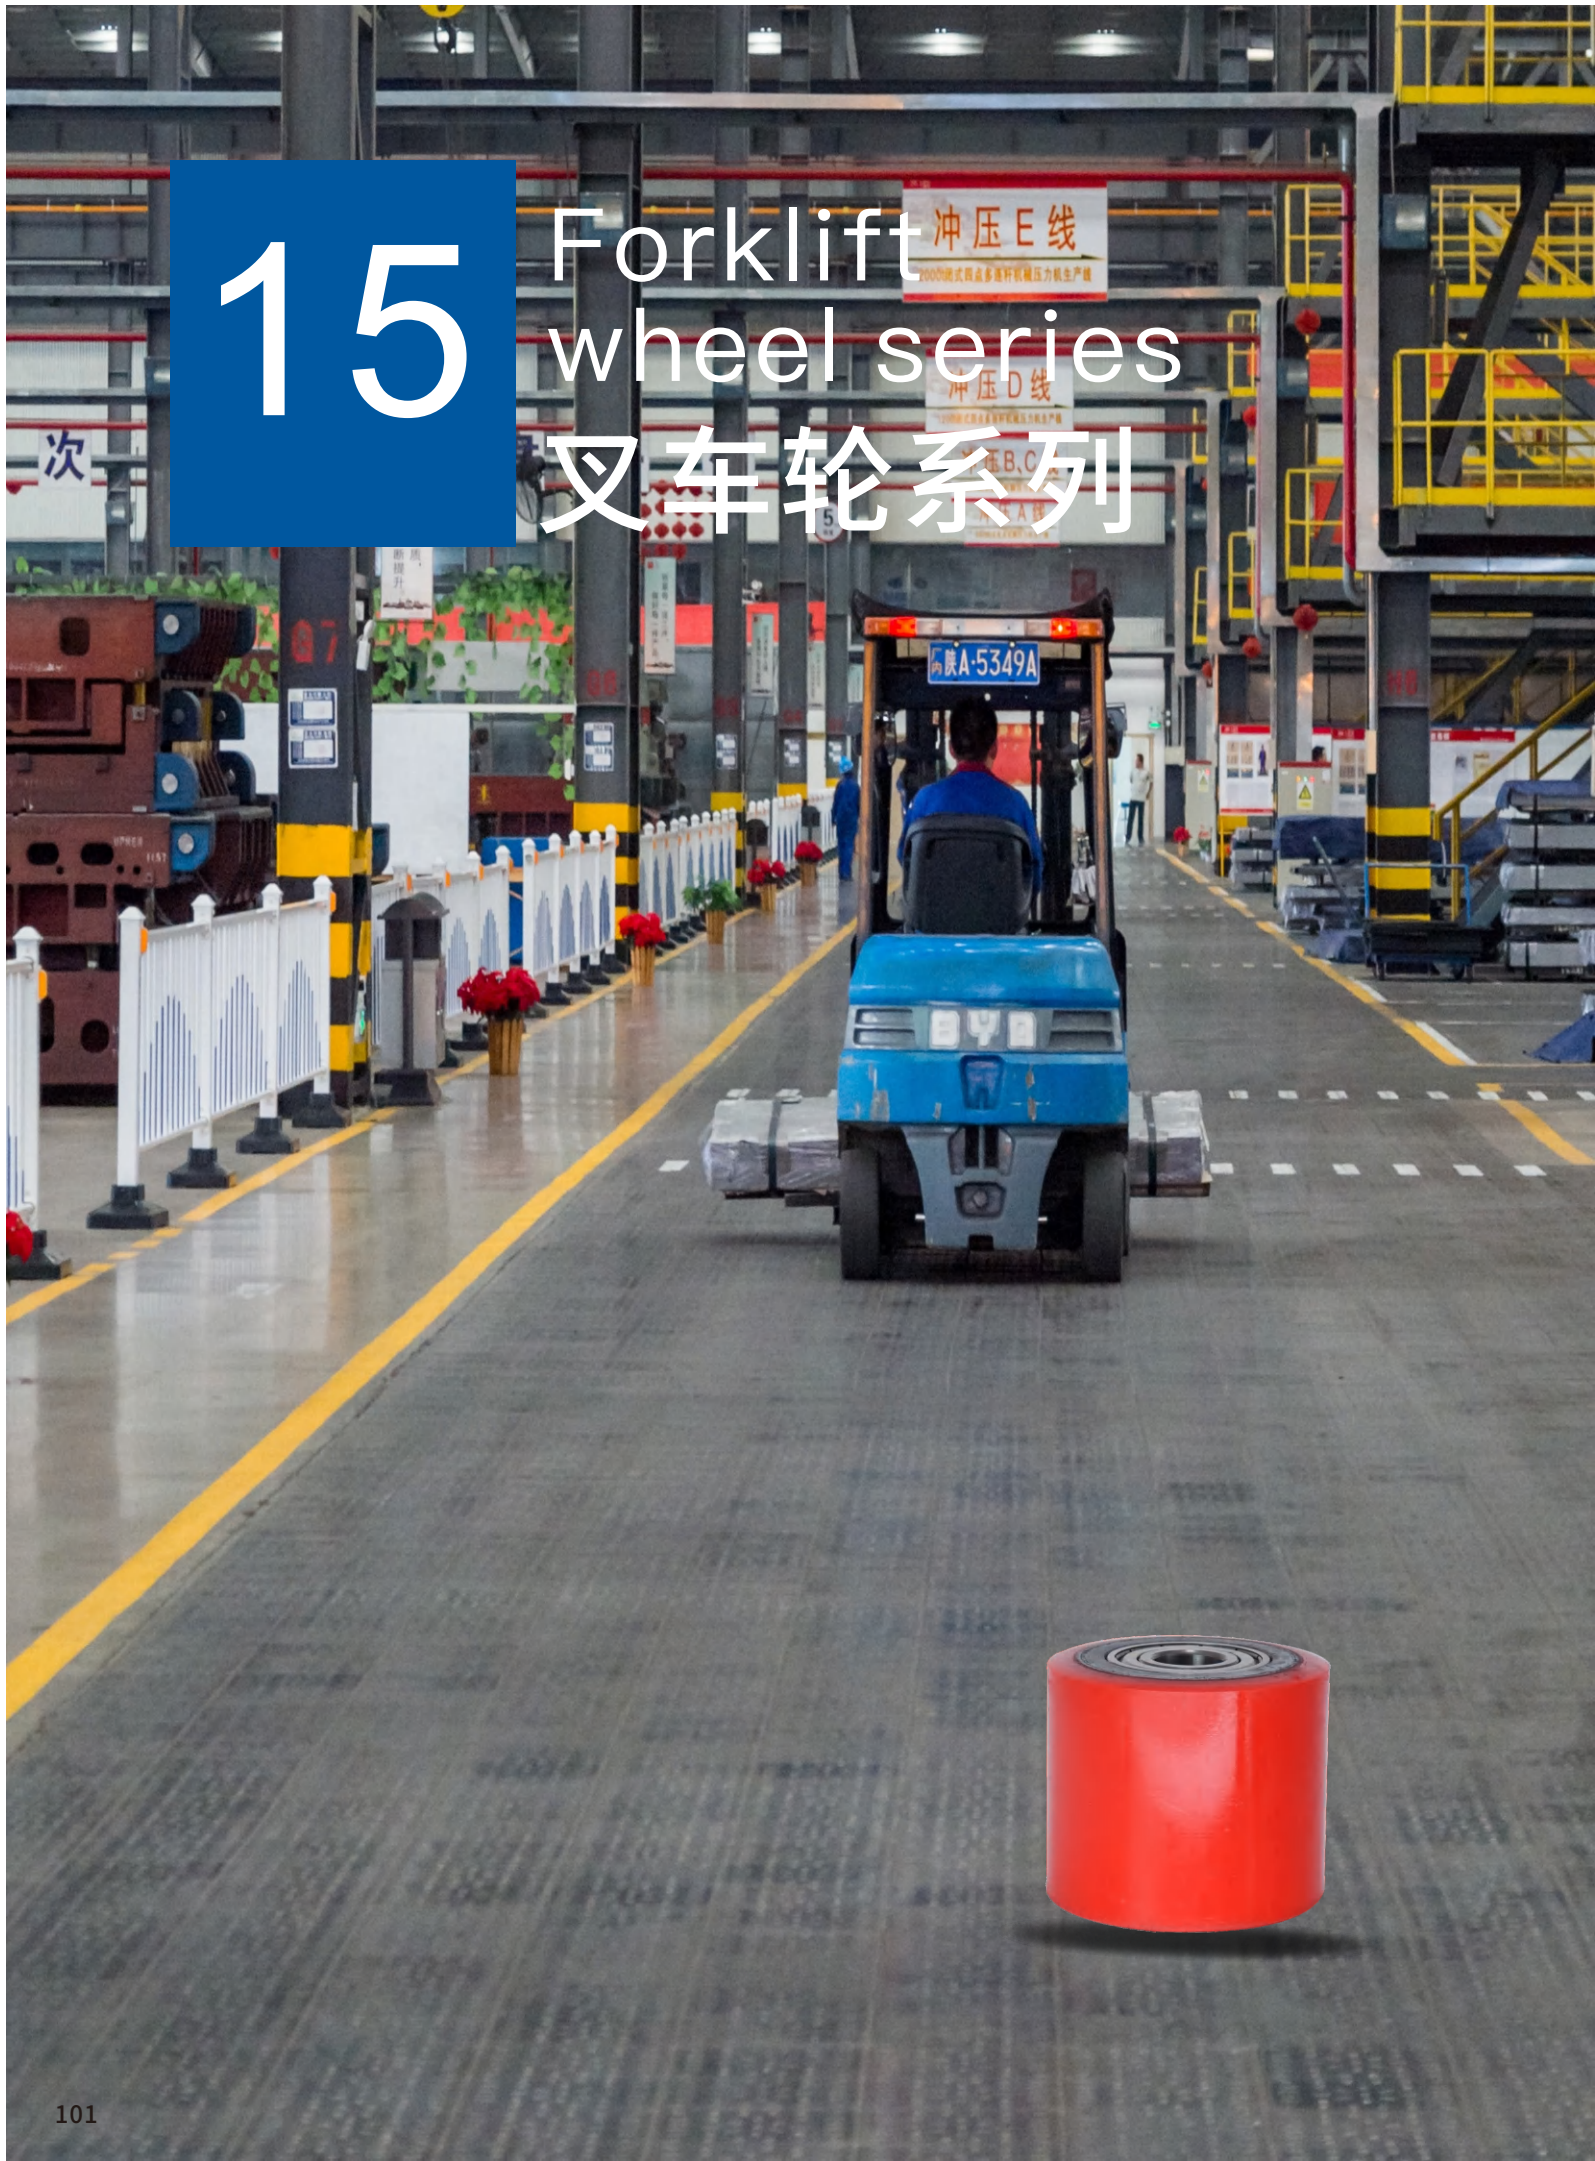

15

Forklift
wheel series
叉车轮系列

Forklift wheel series

叉车轮系列 <<<

Single wheel nylon material 单轮尼龙材质

	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	18	50	Ny1850
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	70	60	Ny7060
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	80	80	Ny8080

	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	20	50	Ny2050
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	80	60	Ny8060
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	80	70	Ny8070

Single wheel PPmaterial 单轮PP材质

	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	18	50	Ny1850-p
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	70	60	Ny7060-p
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	80	80	Ny8080-p

	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	20	50	Ny2050-p
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	80	60	Ny8060-p
	Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
	80	70	Ny8070-p

Forklift wheel series

叉车轮系列 <<<

Single wheel nylon material单轮尼龙材质



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
18	50	NY1850-01



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	60	NY8060-1



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	80	NY8080-3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	100	NY80100-5



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
20	50	NY2050-02



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	70	NY8070-2



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	90	NY8090-4

Single wheel PP material

单轮PP材质



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
18	50	NP1850



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	60	NP8060-1



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	80	NP8080-3



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	100	NP80100-5



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
20	50	NP2050



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	70	NP8070-2



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	90	NP8090-4

Single wheel PU material

单轮PU材质



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
18	50	PU1850



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
70	60	PU7060



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	80	PU8080



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
20	50	PU2050



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	60	PU8060



Wheel Dia 轮径 (mm)	Tread Width 轮宽 (mm)	COOE
80	70	PU8070

16

Plastic panel car series
胶板车系列



Complex copolymer foldable trolley

新款复合共聚胶板车 <<<

- High quality pp composite copolymer
 - Single wheel rubber material
 - Double ball bearing
- 优质的PP复合共聚物
 - 单轮Rubber材质
 - 双滚珠轴承



型号 Model	MS09101	MS09102			
平板尺寸mm Tablet Size	50x70	60X90	安装高度mm Front tire size	116	143
车轮直径mm Sheet thickness	100	125	车身总高度mm Rear tire size	835	875
载重kgs Loading	200	400	车身总重量kgs Maximum height fork	10	13.5
脚轮材质 Casters Material	PVC	PVC	装箱尺寸mm Packing size	73.5X49.5X14.3	91.2X61X16

Blue foldable trolley

蓝色胶板车 <<<

- High quality pp composite copolymer
- Single wheel rubber material
- Double ball bearing

- 胶板优质复合共聚氨酯
- 单轮Rubber材质
- 双滚珠轴承



型号 Model	MW09101	MW09102	MW-D600				
平板尺寸mm Tablet Size	50x70	60X90	65X110	安装高度mm Front tire size	116	143	143
车轮直径mm Sheet thickness	100	125	125	车身总高度mm Rear tire size	835	875	875
载重kgs Loading	200	400	600	车身总重量kgs Maximum height fork	9.75	12.65	17.5
脚轮材质 Casters Material	Rubber	Rubber	Rubber	装箱尺寸mm Packing size	73.5X49.5X14.3	91.2X61X16	105.5X16X64

Double-deck plastic trolley

双层胶板车 <<<

- High quality pp composite copolymer
- Single wheel rubber material
- Double ball bearing

- 胶板优质复合共聚氨酯
- 单轮rubber材质
- 双滚珠轴承



型号 Model	MS09303	MS09304		
平板尺寸mm Tablet Size	50x70	60X90	车板间距mm Car plate spacting	500 550
车轮直径mm Sheet thickness	100	125	车身总高度mm The totall height of the vehicle bady	950 1050
载重kgs Loading	200	400	护栏高mm high fence	78 85
上层板离地mm The upper plate from the ground	700	736	自重kgs Weight	15 21
安装高度 Installation height	116	143	装箱尺寸mm Packing size	73X50X25 107X62X15

Stainless Steel
Foldable trolley

不锈钢车 <<<

- High quality stainless steel
- Single wheel PVC(rubber) material
- Double ball bearing

- 优质不锈钢
- 单轮PVC(rubber)材质
- 双滚珠轴承



型号 Model	MW09201	MW09202	MW09203				
平板尺寸mm Tablet Size	50x70	60X90	60X120	安装高度mm Front tire size	116	143	143
车轮直径mm Sheet thickness	100	125	125	车身总重量kgs Maximum height fork	7	9	10.8
载重kgs Loading	200	400	600	装箱尺寸mm Packing size	73.5X49.5X14.3	91.2X61X16	121.5X61X16
脚轮材质 Casters Materual	PP	PP	PP				

Yellows steel trolley

黄色方管车 <<<

- High quality steel
- 优质铁方管



Heavy duty caster wheel
B series
can be used for trolley

型号 Model	MW09501	MW09502	MW09503	MW09502	MW09502
平板尺寸mm Tablet Size	50x70	60x90	65x100	65x120	80x120
载重kgs Loading	250	400	500	600	800
胶板材质 Sheet Materual	铁方管	铁方管	铁方管	铁方管	铁方管
车身总重量kgs Maximum height fork	6.5	9.1	9.79	11	13.5

Blue steel trolley

蓝色方管车 <<<

- High quality steel
- 优质铁方管

型号 Model	MW09601	MW09602
平板尺寸mm Tablet Size	50x70	60x90
载重kgs Loading	250	400
胶板材质 Sheet Materual	铁方管	铁方管
车身总重量kgs Maximum height fork	6.4	9.2

Green complex
copolymer foldable trolley

绿推行胶板车 <<<

- High quality stainless steel

■ Single wheel tpr material

■ Double ball bearing
- 优质不锈钢

■ 单轮TPR材质

■ 双滚珠轴承



型号 Model	MS09101	MS09102			
平板尺寸mm Tablet Size	50x70	60X90	安装高度mm Front tire size	116	143
车轮直径mm Sheet thickness	100	125	车身总重量kgs Maximum height fork	10	13.5
载重kgs Loading	200	400	装箱尺寸mm Packing size	73.5X49.5X14.3	91.2X61X16
脚轮材质 Casters Materual	Rubber	Rubber			

Hand-carts

手拉车 <<<



型号 Model	MW09701	MW09702	MW09703
产品名称 Product name	Hand Cart (Basic Type)	Folding Hand Cart (Luxury Style 1)	Folding Hand Cart (Luxury Style 1)
车轮直径mm Sheet thickness	75	75	75
平板尺寸mm Tablet Size	310X500	380X590	360X510
载重kgs Loading	125	150	125
产品材质 Product material	Aluminium alloy +PP	Aluminium alloy +PP	Aluminium alloy +PP
车身总重量kgs Maximum height fork	3	5	4
脚轮材质 Casters Materual	Rubber	Rubber	Rubber
安装高度mm Front tire size	130	170	170
拉杆调节高度mm The lever adjusts the height	900	1010	930
备注 Remark	Wheels are not collapsible	Wheels are collapsable	Wheels are collapsable